

Ocean surface waves impact on air-sea momentum flux

César Sauvage & Co-Authors

University of Hawai'i at Manoa, Honolulu, HI, USA

CICESE Summer School Seminar | May 1st 2026



©Ben Thouard



UNIVERSITY
of HAWAII®
MĀNOA



Contact: csauvage@hawaii.edu

Wave – Wind interaction parameterization


$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

Wave – Wind interaction parameterization

$$\tau = \rho_a C_d U_{10}^2$$


$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

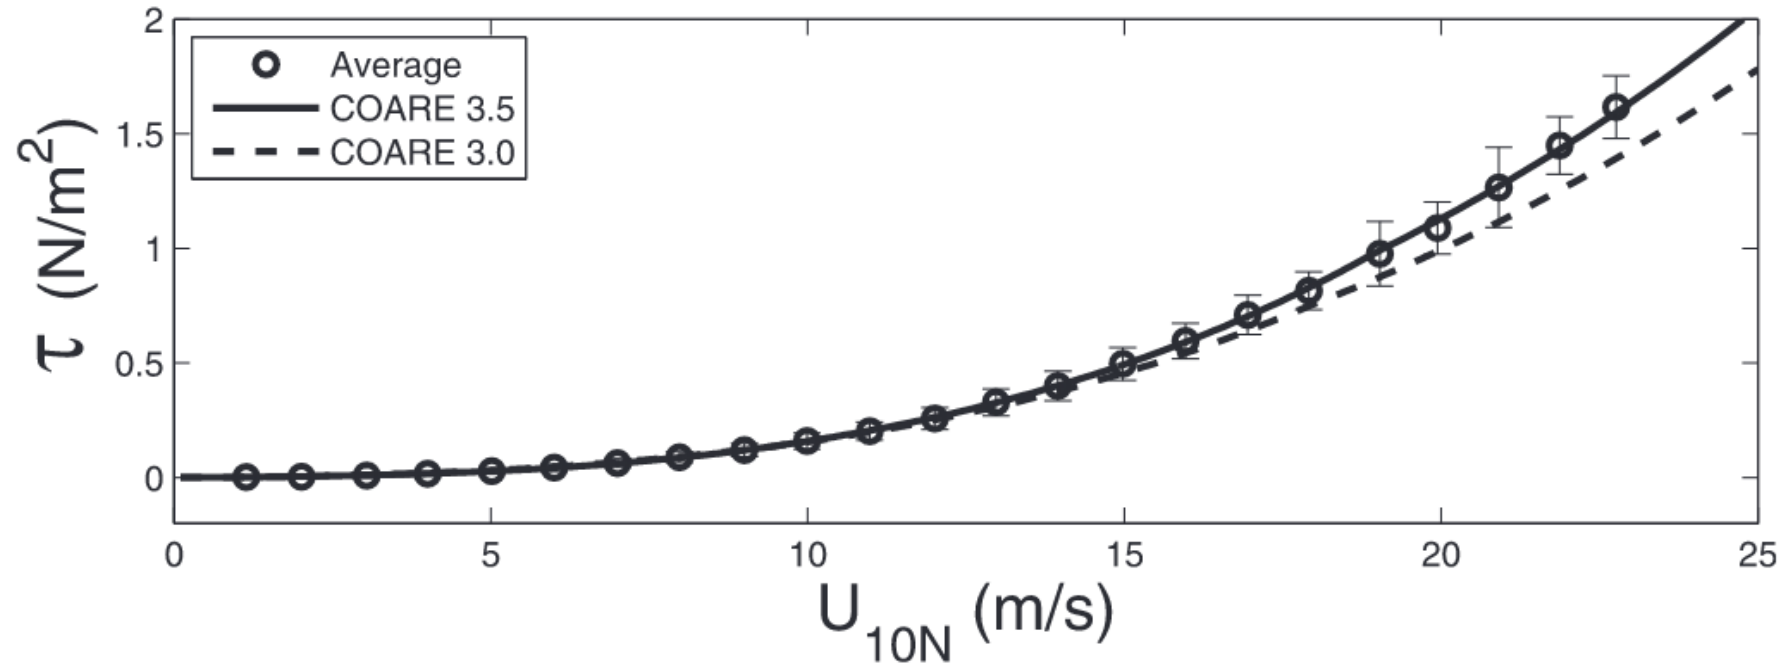

Wave – Wind interaction parameterization

$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

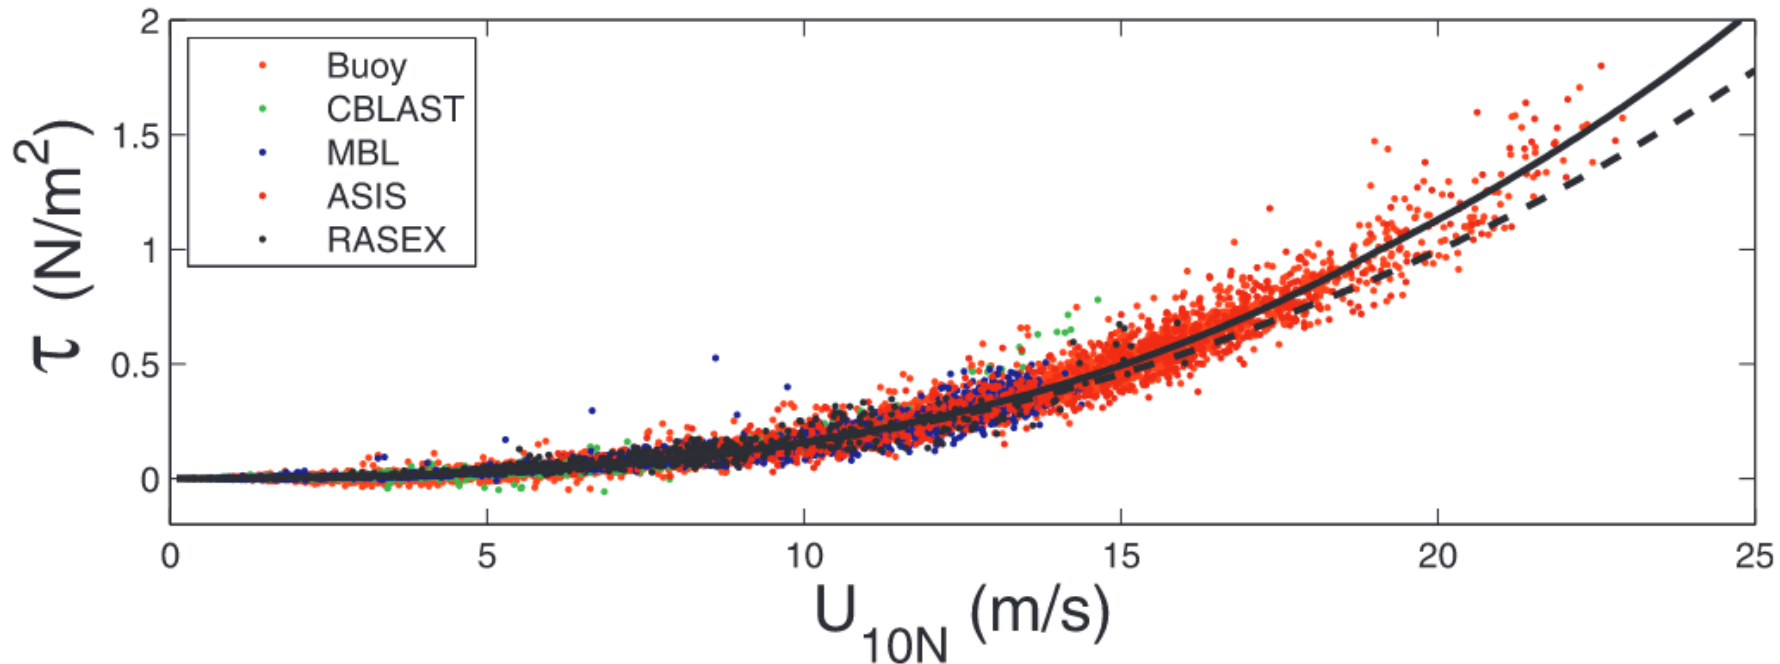

Wave – Wind interaction parameterization


$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

Wave-based formulations exist in many bulk flux algorithms that model z_0 as a function of wave age or wave age/slope (e.g., Taylor & Yelland, 2001; Oost et al., 2002; Edson et al., 2013)


Wave Age

Wave age can be defined as the ratio of the phase speed of the waves (c_p) over the surface wind speed (u_{10}) $\frac{c_p}{U_{10}}$

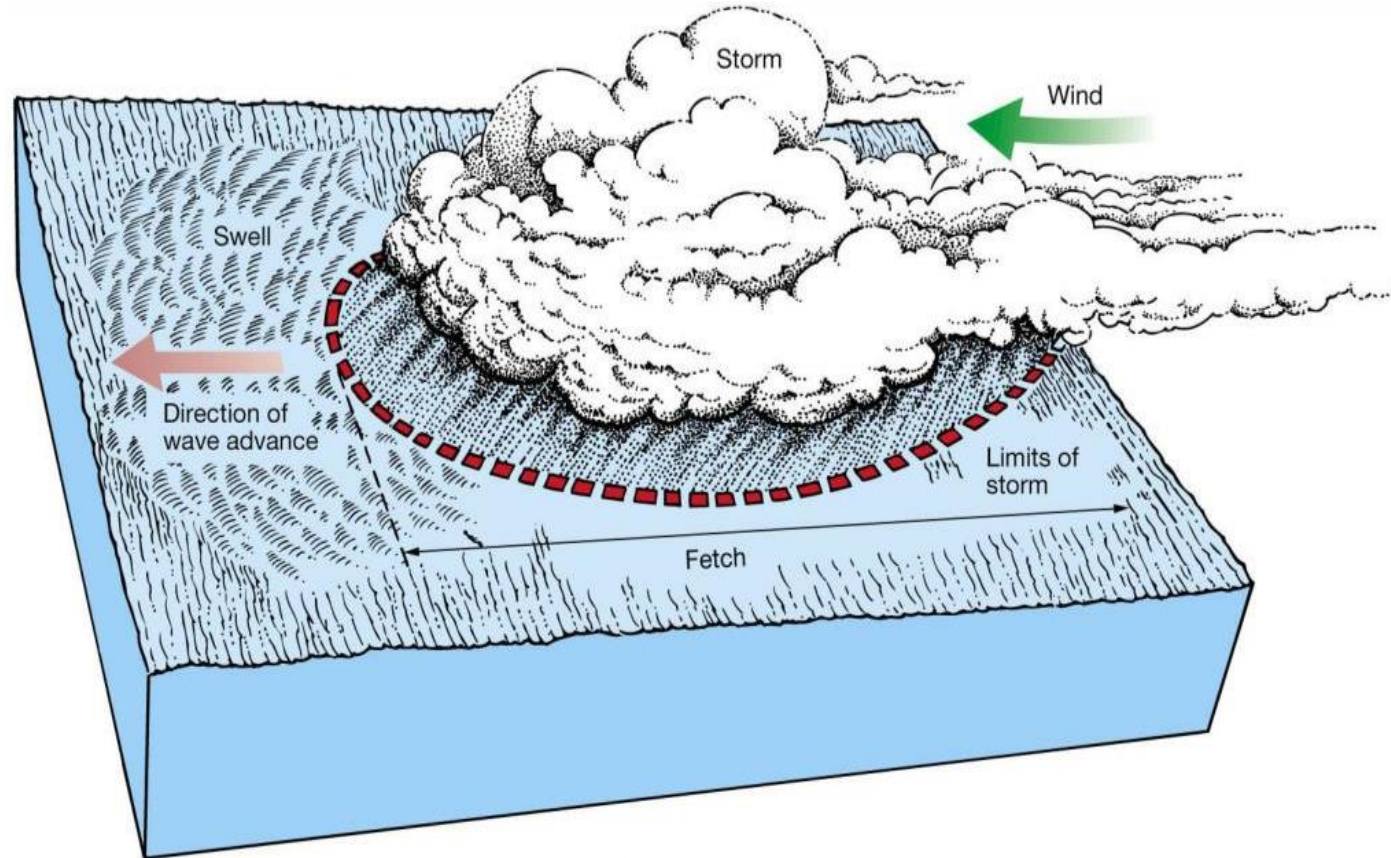


Wave Age

Wave age can be defined as the ratio of the phase speed of the waves (c_p) over the surface wind speed (u_{10}) $\frac{c_p}{U_{10}}$

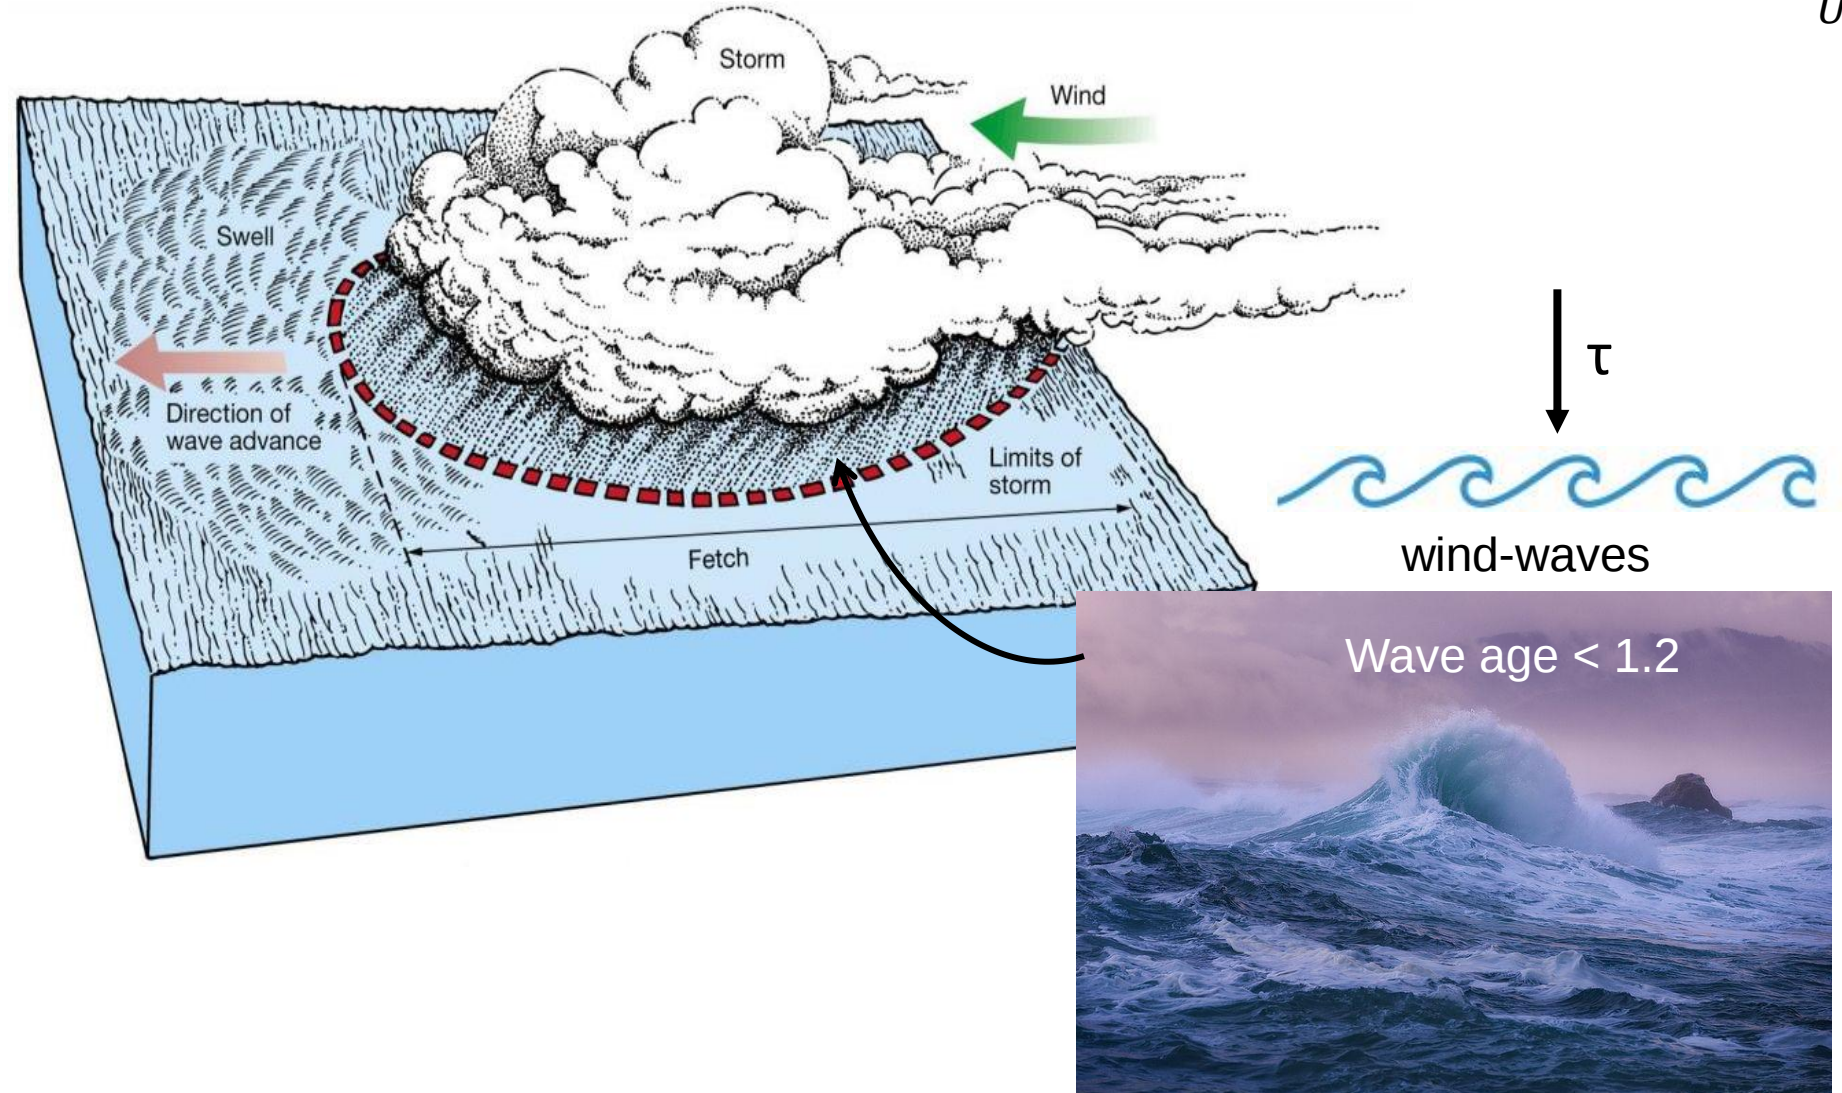


Wave Age

Wave age can be defined as the ratio of the phase speed of the waves (c_p) over the surface wind speed (u_{10}) $\frac{c_p}{U_{10}}$

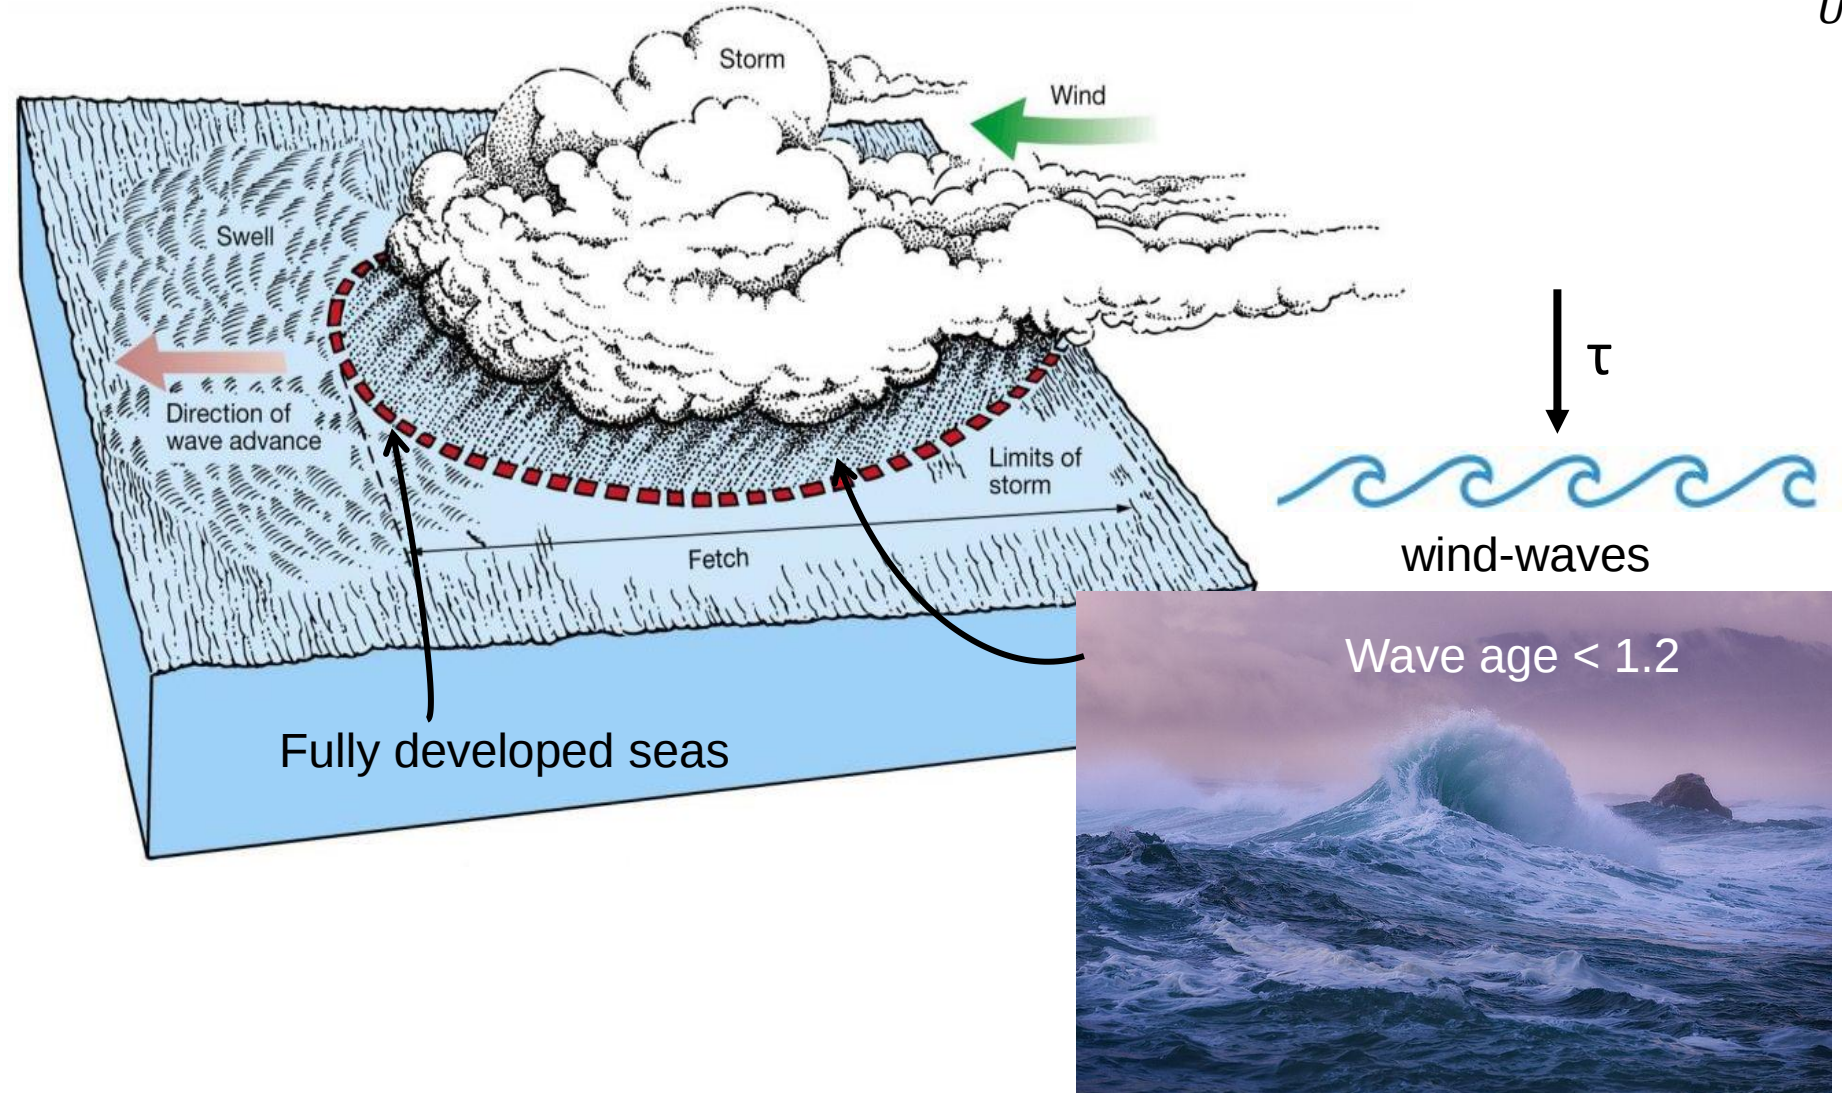


Wave Age

Wave age can be defined as the ratio of the phase speed of the waves (c_p) over the surface wind speed (u_{10}) $\frac{c_p}{U_{10}}$

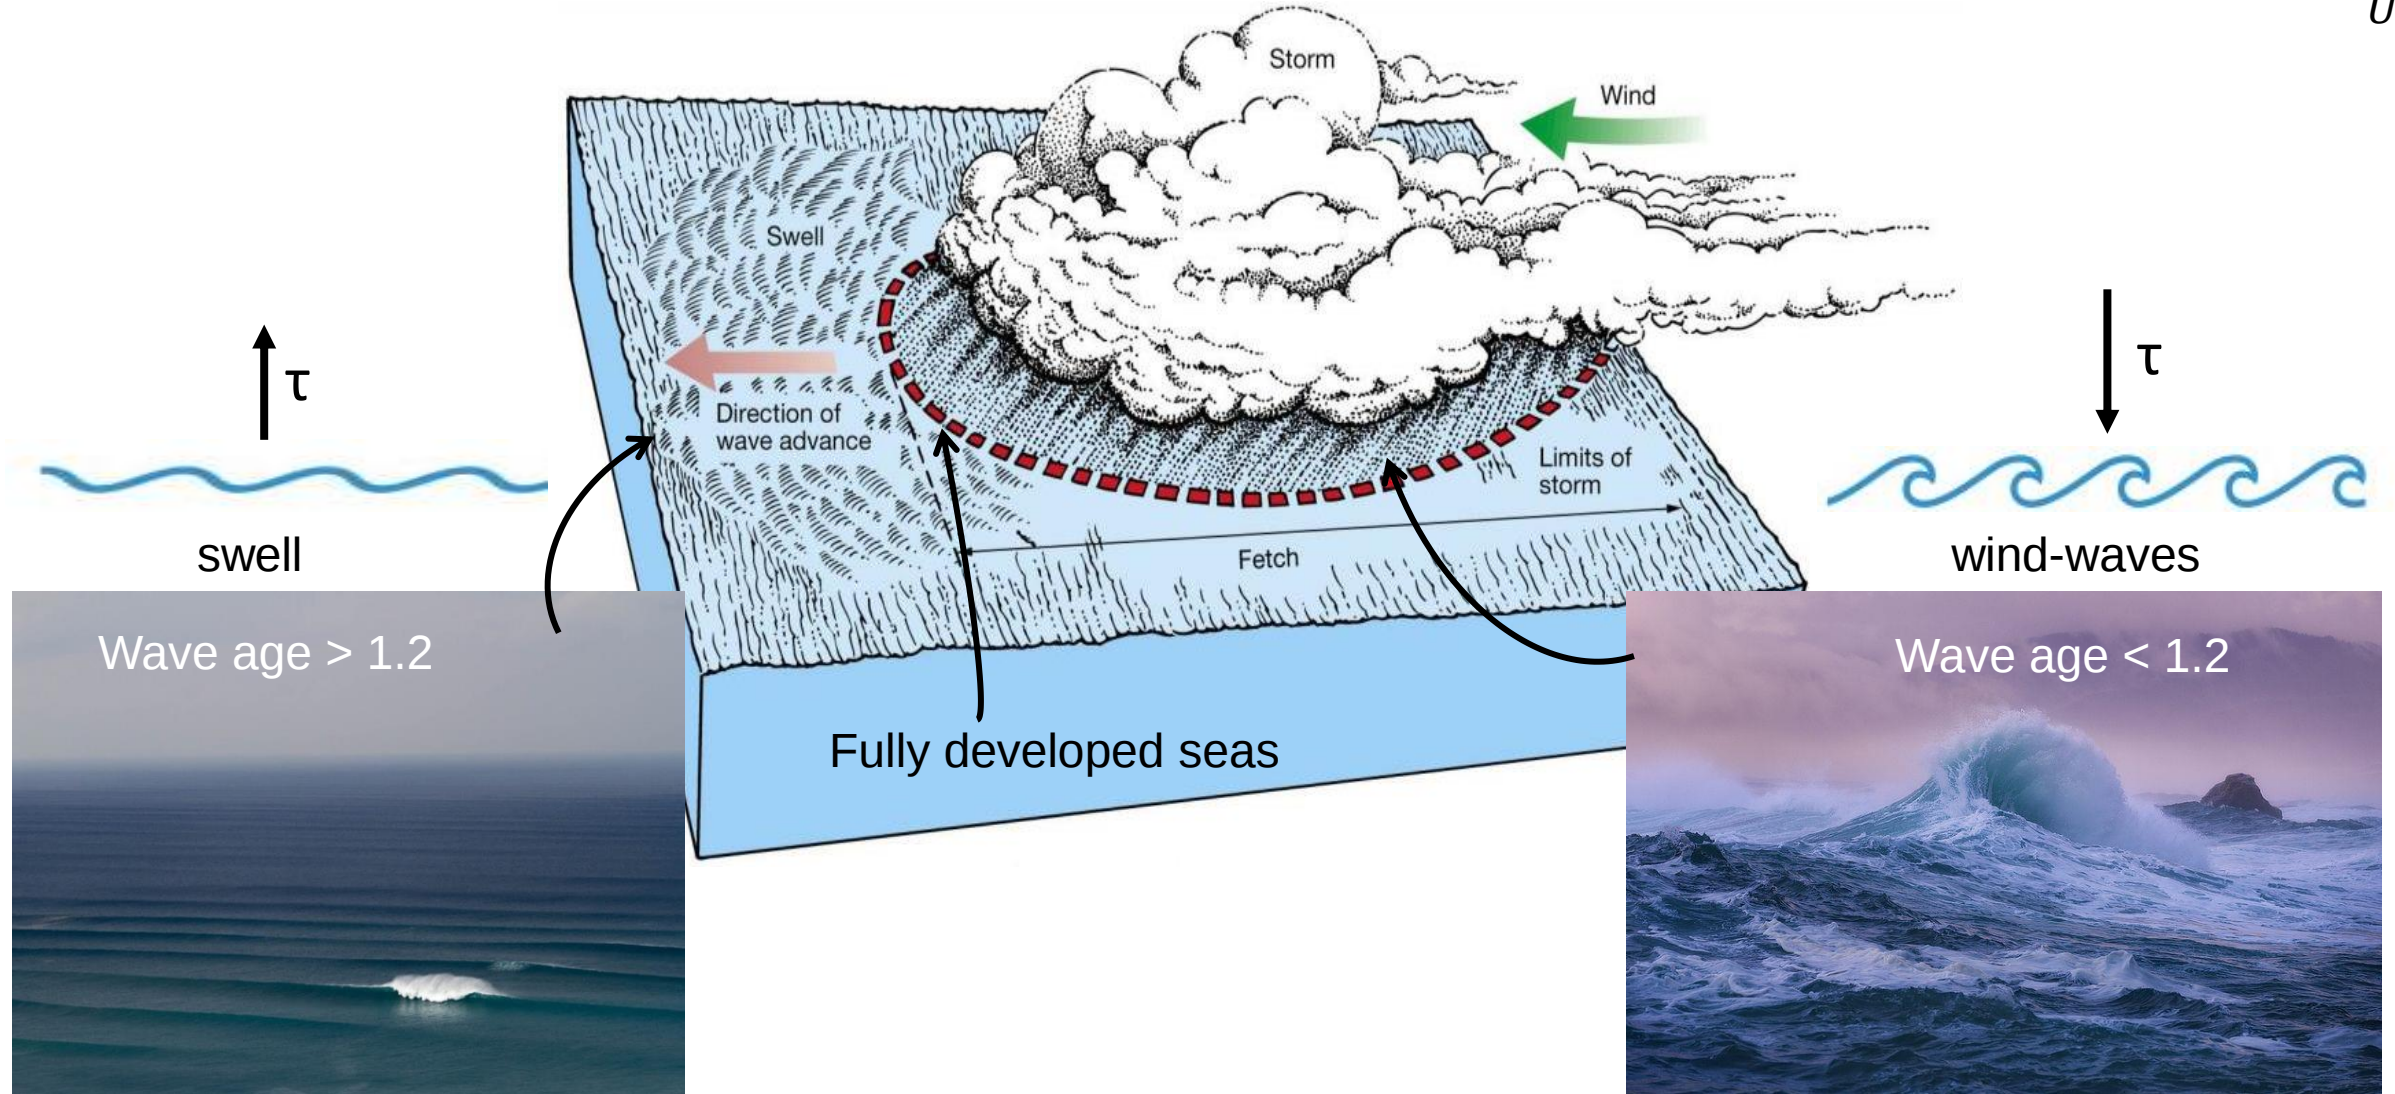

Wave Age

Wave age can be defined as the ratio of the phase speed of the waves (c_p) over the surface wind speed (u_{10}) $\frac{c_p}{U_{10}}$

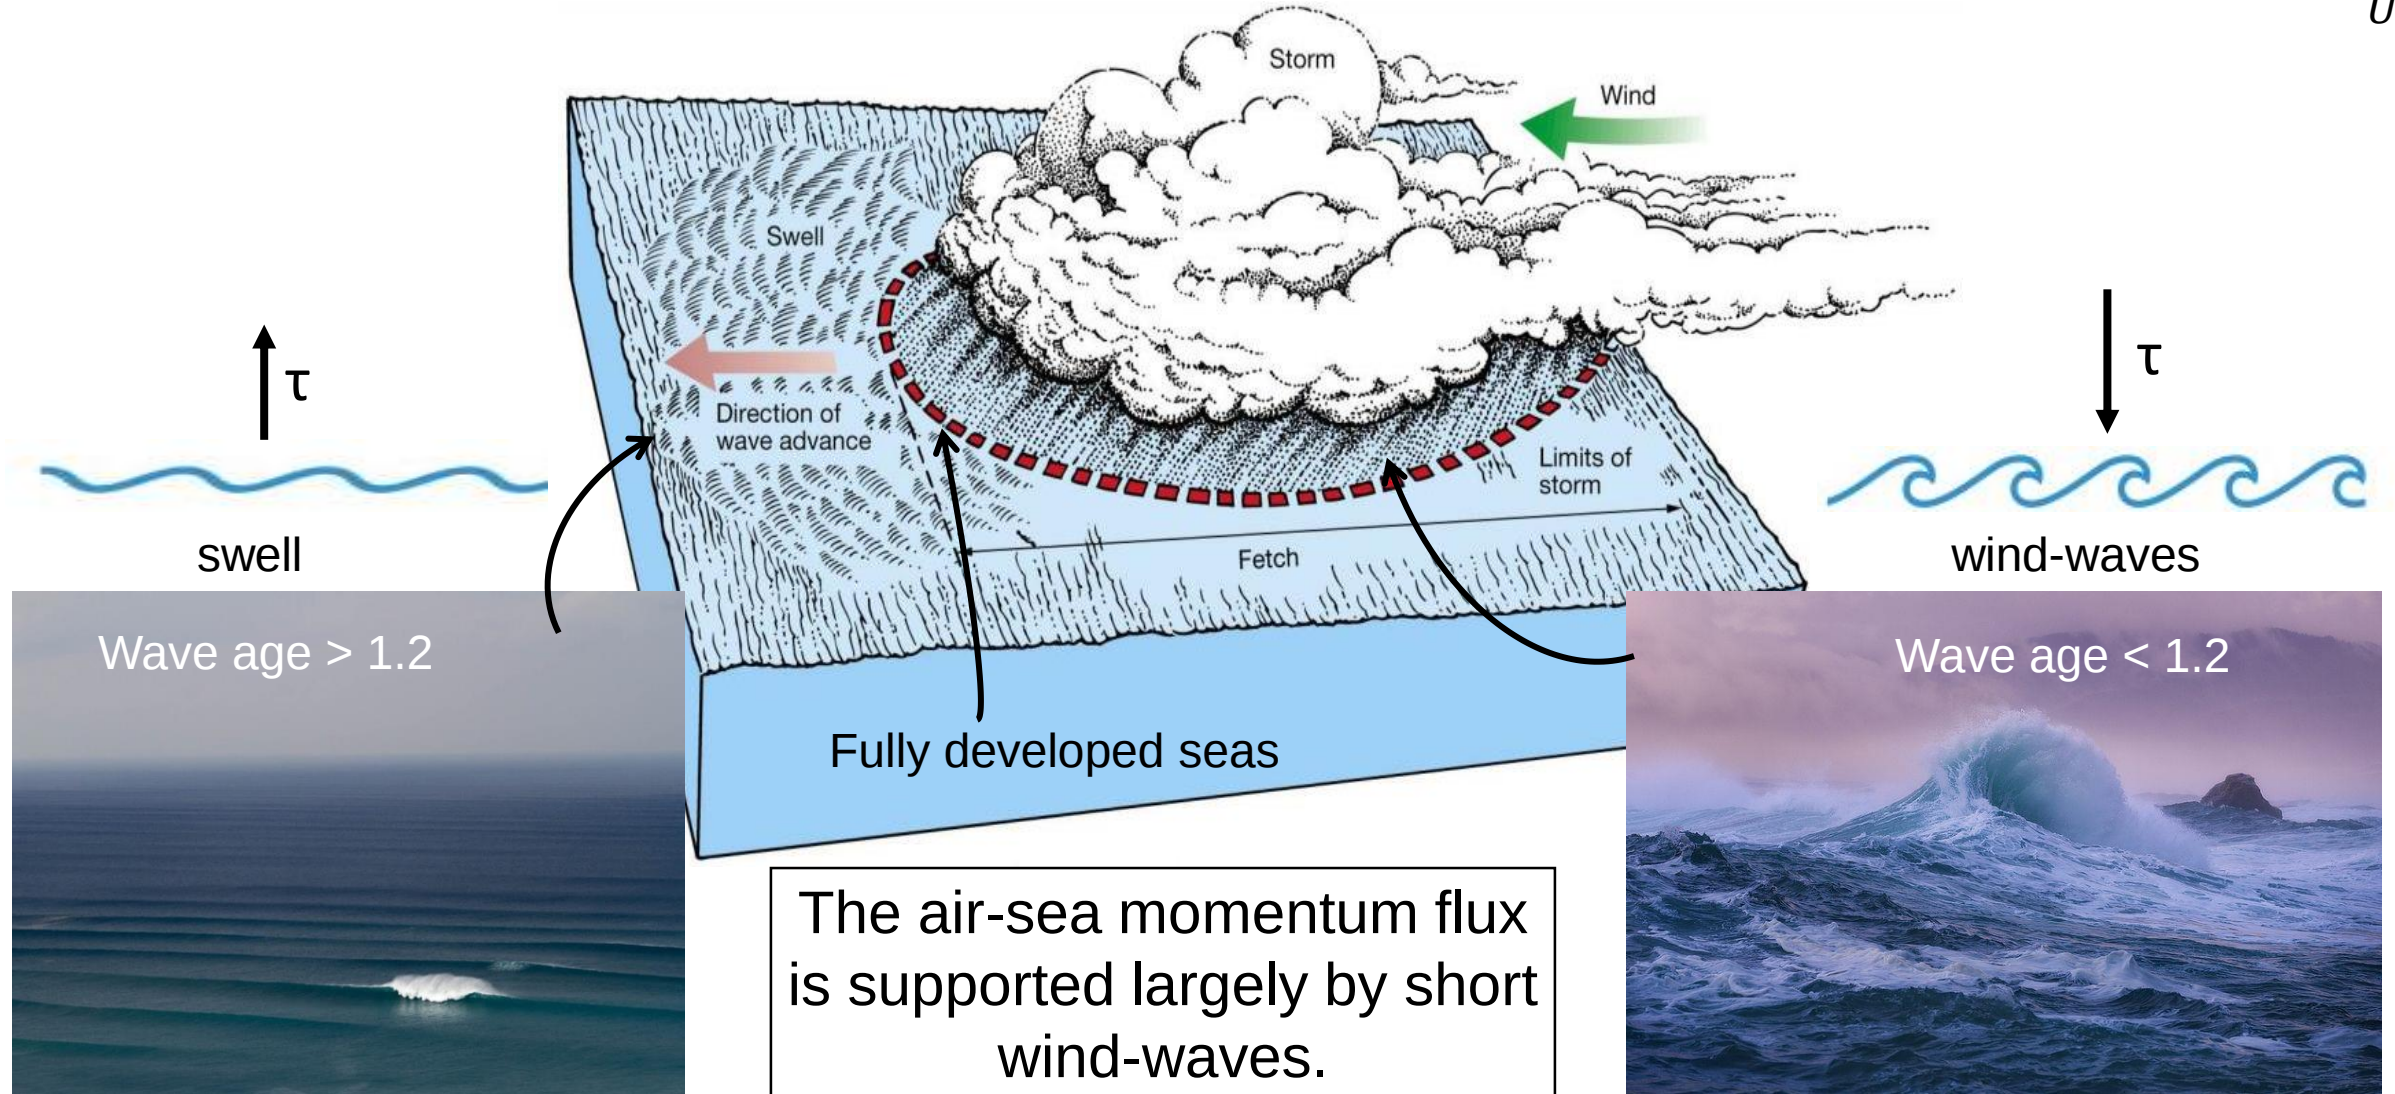

(i.e. Janssen, 1989; Moon et al., 2004 ...)

Wave – Wind interaction parameterization

$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

Wave-based formulations exist in many bulk flux algorithms that model z_0 as a function of wave age or wave age/slope (e.g., Taylor & Yelland, 2001; Oost et al., 2002; **Edson et al., 2013**)

Wave – Wind interaction parameterization


$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

Wave-based formulations exist in many bulk flux algorithms that model z_0 as a function of wave age or wave age/slope (e.g., Taylor & Yelland, 2001; Oost et al., 2002; **Edson et al., 2013**)

→ COARE3.5 (Fairall et al. 1996, 2003; Edson et al. 2013)

Developed and tuned primarily by using the wave data collected from the extratropics

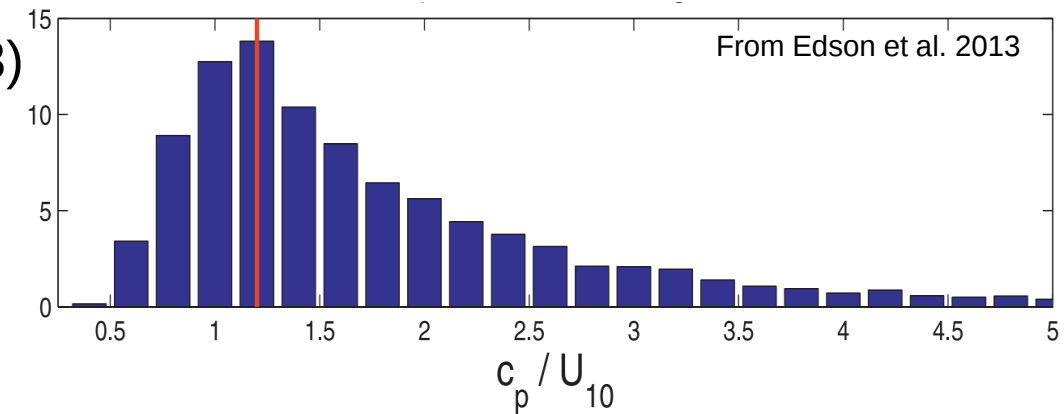

Wave – Wind interaction parameterization




$$\tau = \rho_a C_d U_{10}^2$$

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2 \quad z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

Wave-based formulations exist in many bulk flux algorithms that model z_0 as a function of wave age or wave age/slope (e.g., Taylor & Yelland, 2001; Oost et al., 2002; **Edson et al., 2013**)

→ COARE3.5 (Fairall et al. 1996, 2003; Edson et al. 2013)

Developed and tuned primarily by using the wave data collected from the extratropics

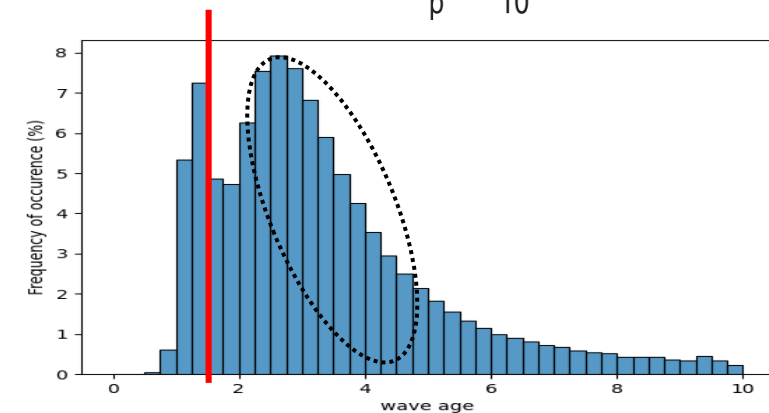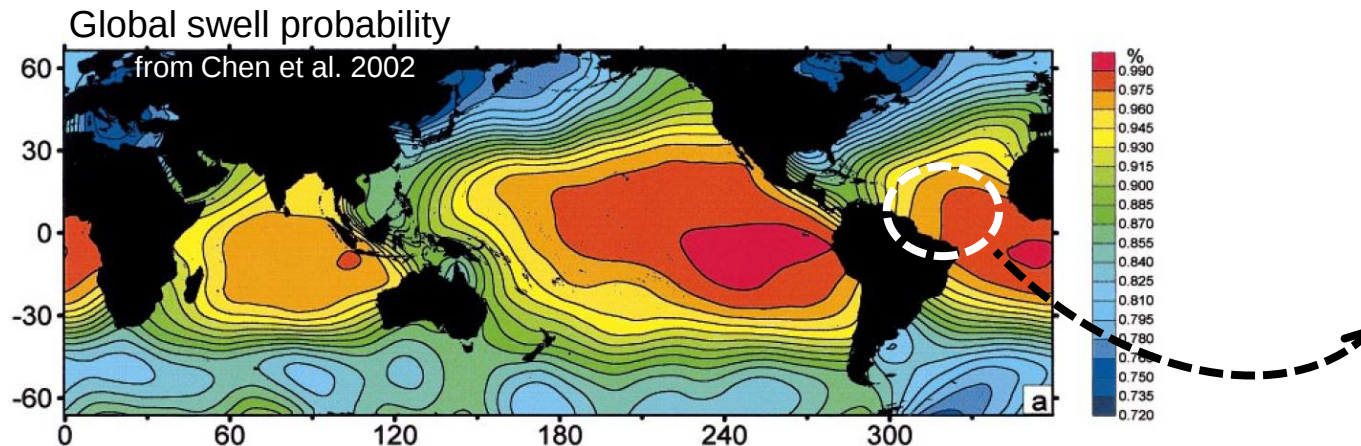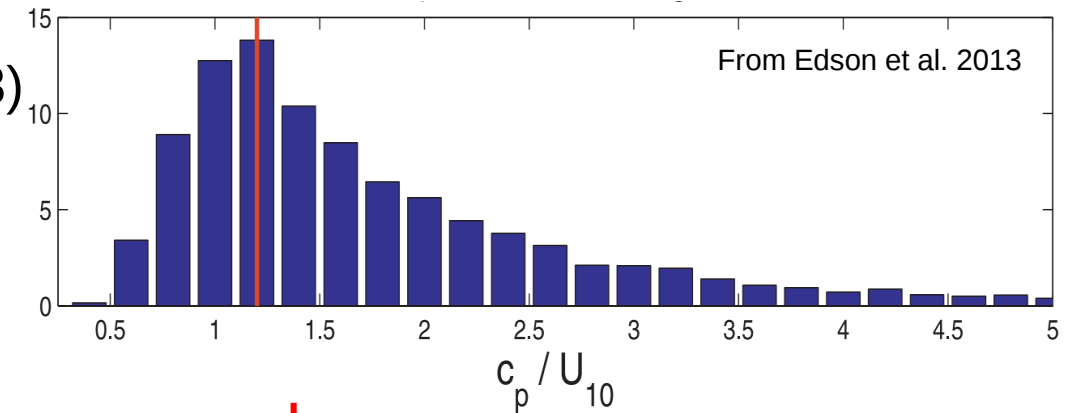

$$\tau = \rho_a C_d U_{10}^2$$

Ocean roughness length (z_0) parameterization in COARE3.5 (Edson et al. 2013)

$$C_D \cong \left[\frac{\kappa}{\ln(z/z_0) - \psi_m(z/L)} \right]^2$$

$$z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

1. Wind Speed Dependent Formulation (WSDF)

with wind speed only

$$z_0^{\text{rough}} = \alpha \frac{u_*^2}{g}$$

$\alpha = f_1(U_{10N})$
Charnock coefficient

- Wind-wave equilibrium: Wind seas under high wind and swell under low wind.
- Waves aligned with winds ($\theta=0$)
- Still, it generally works well under most conditions.

$$\tau = \rho_a C_d U_{10}^2$$

Ocean roughness length (z_0) parameterization in COARE3.5 (Edson et al. 2013)

$$C_D \cong \left[\frac{\kappa}{\ln(z_0/L) - \psi_m(z/L)} \right]^2$$

$$z_0 = z_0^{\text{smooth}} + z_0^{\text{rough}}$$

1. Wind Speed Dependent Formulation (WSDF)

with wind speed only

$$z_0^{\text{rough}} = \alpha \frac{u_*^2}{g}$$

$\alpha = f_1(U_{10N})$
Charnock coefficient

- Wind-wave equilibrium: Wind seas under high wind and swell under low wind.
- Waves aligned with winds ($\theta=0$)
- Still, it generally works well under most conditions.

2. Wave-Based Formulation (WBF)

with wave age and wave slope

$$z_0^{\text{rough}} = H_s \cdot 0.09 \cdot \left(\frac{u_*}{C_p} \right)^2$$

significant wave height

inverse wave age

“peak” wave speed
 $C_p = g^*(T_p/2\pi)$

T_p : wave period at the spectral peak

- Waves aligned with winds ($\theta=0$)

SCOAR regional coupled model (Seo et al. 2007)

Sensitivity runs to COARE3.5:

Wave-based formulation (WBF)

Wind speed only formulation (WSDF)


Coupling frequency 3h
Horizontal resolution : 10km

Boundary forcing:

Atmospheric forcing:
hourly ERA5

Ocean forcing:
Daily Mercator Ocean Inter.



Wave forcing:
3-hourly spectral points
(Ifremer global runs)

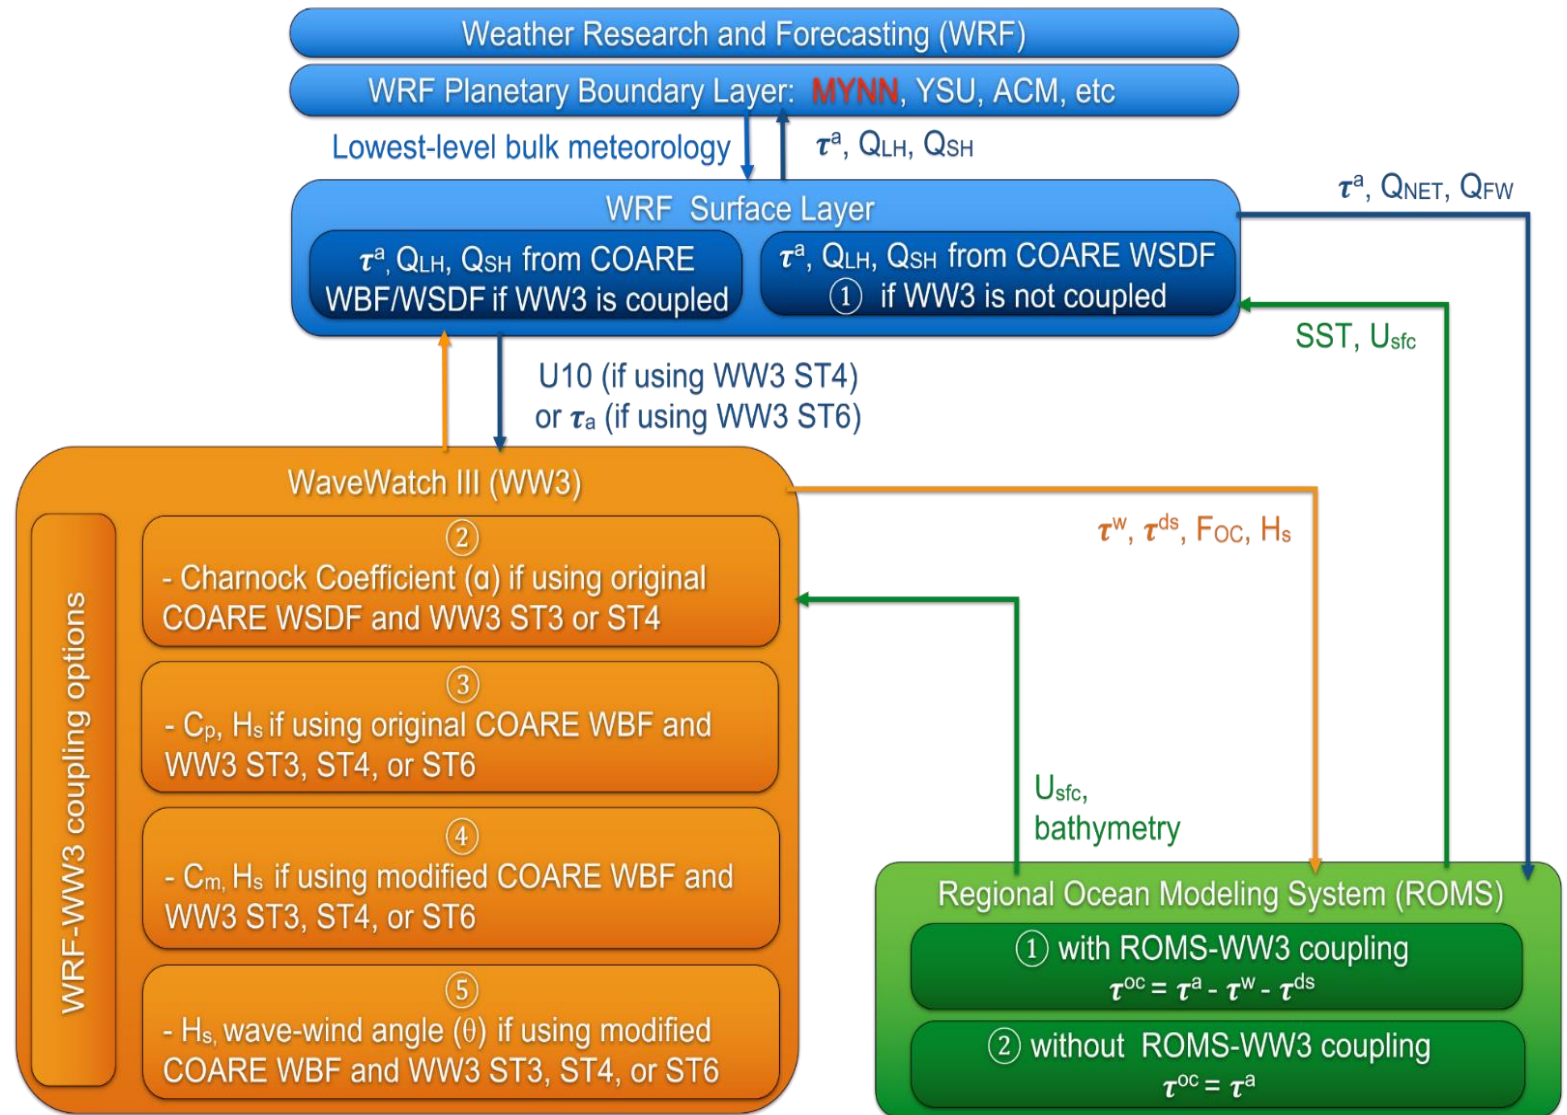

Study case: January 8, 2020

Wind speed based formulation (**WSDF**)
Wave based formulation (**WBF**)




- Northwesterly swell entering the domain under persistent trade winds

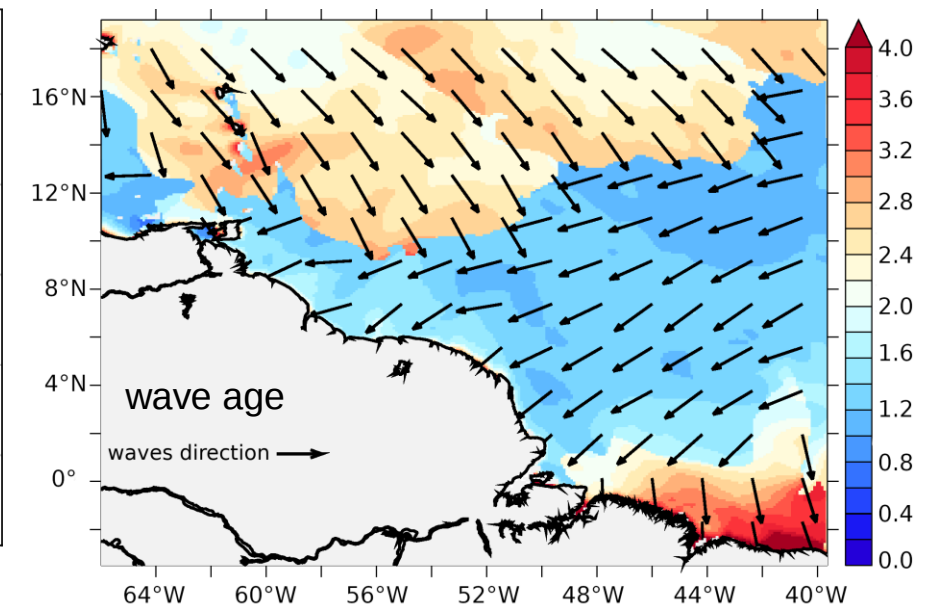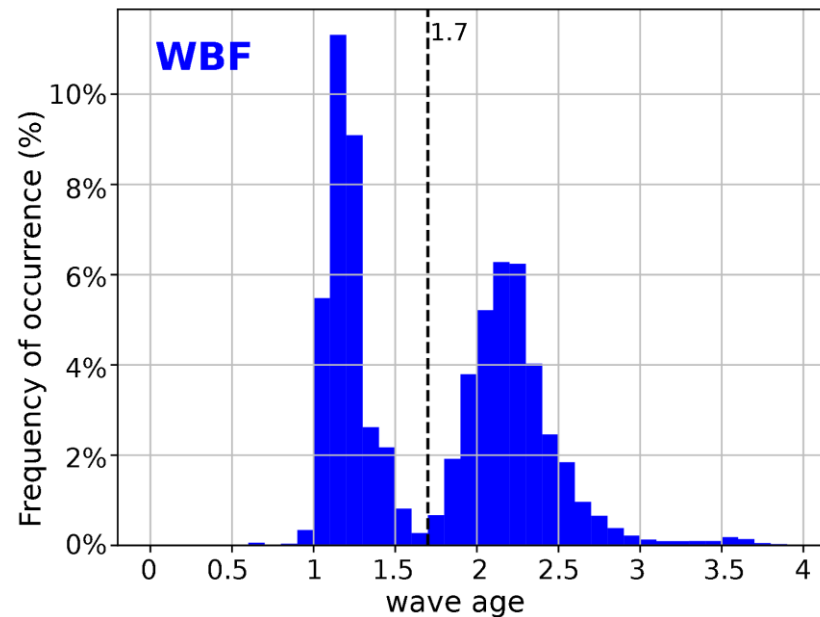

Study case: January 8, 2020

Wind speed based formulation (**WSDF**)
Wave based formulation (**WBF**)

- Northwesterly swell entering the domain under persistent trade winds
- Young waves and equilibrium waves tend to increase the surface stress
- Swell and mixed seas tend to significantly decrease the surface stress under moderate wind

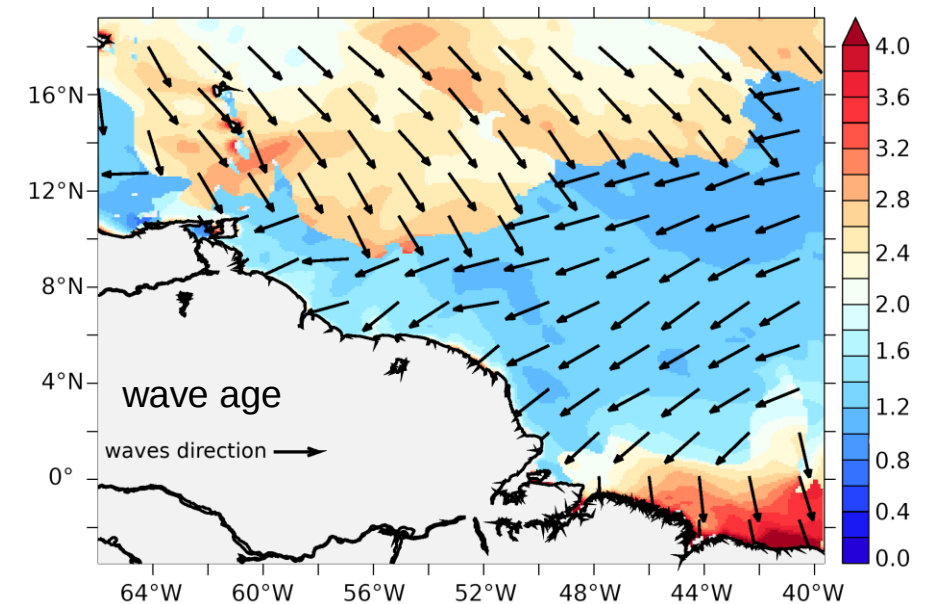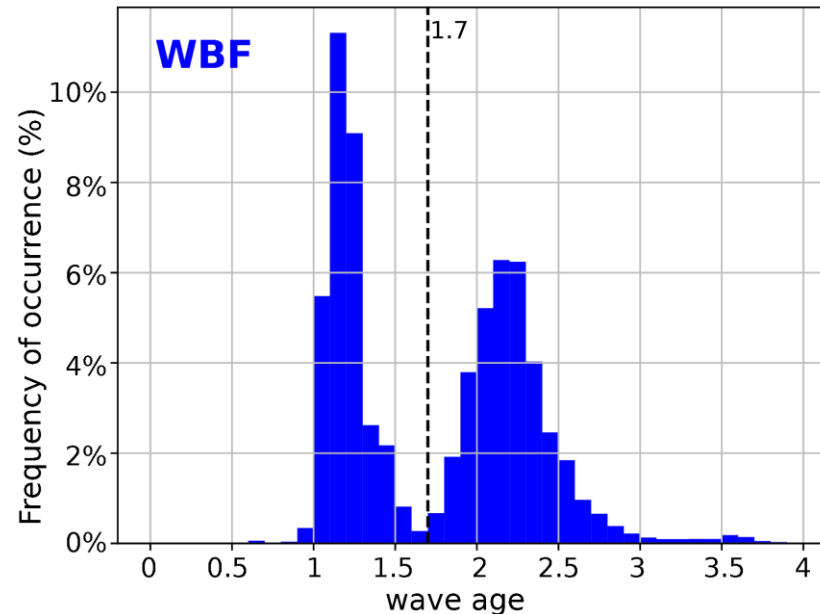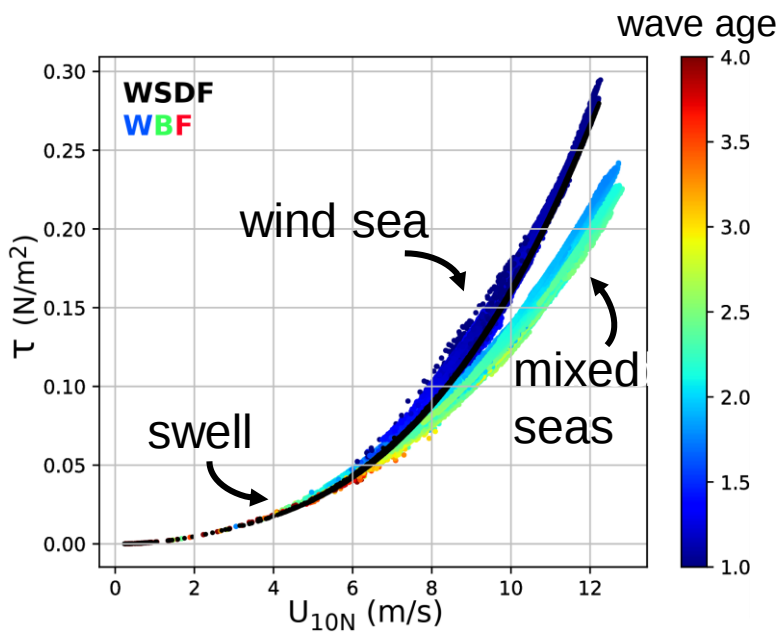

Study case: January 8, 2020

Wind speed based formulation (**WSDF**)
Wave based formulation (**WBF**)


- Northwesterly swell entering the domain under persistent trade winds
- Young waves and equilibrium waves tend to increase the surface stress
- Swell and mixed seas tend to significantly decrease the surface stress under moderate wind

Large spatial differences of the surface stress :

- large decrease of the stress above the northerly swell
- Increase above the youngest waves

} $\pm 0.2 \cdot 10^{-1} \text{ N/m}^2$ difference ($\sim 10\% - 15\%$)

Lead to large impact on the near surface wind with differences $\pm 0.5 \text{ m/s}$ ($\sim 5\%$)

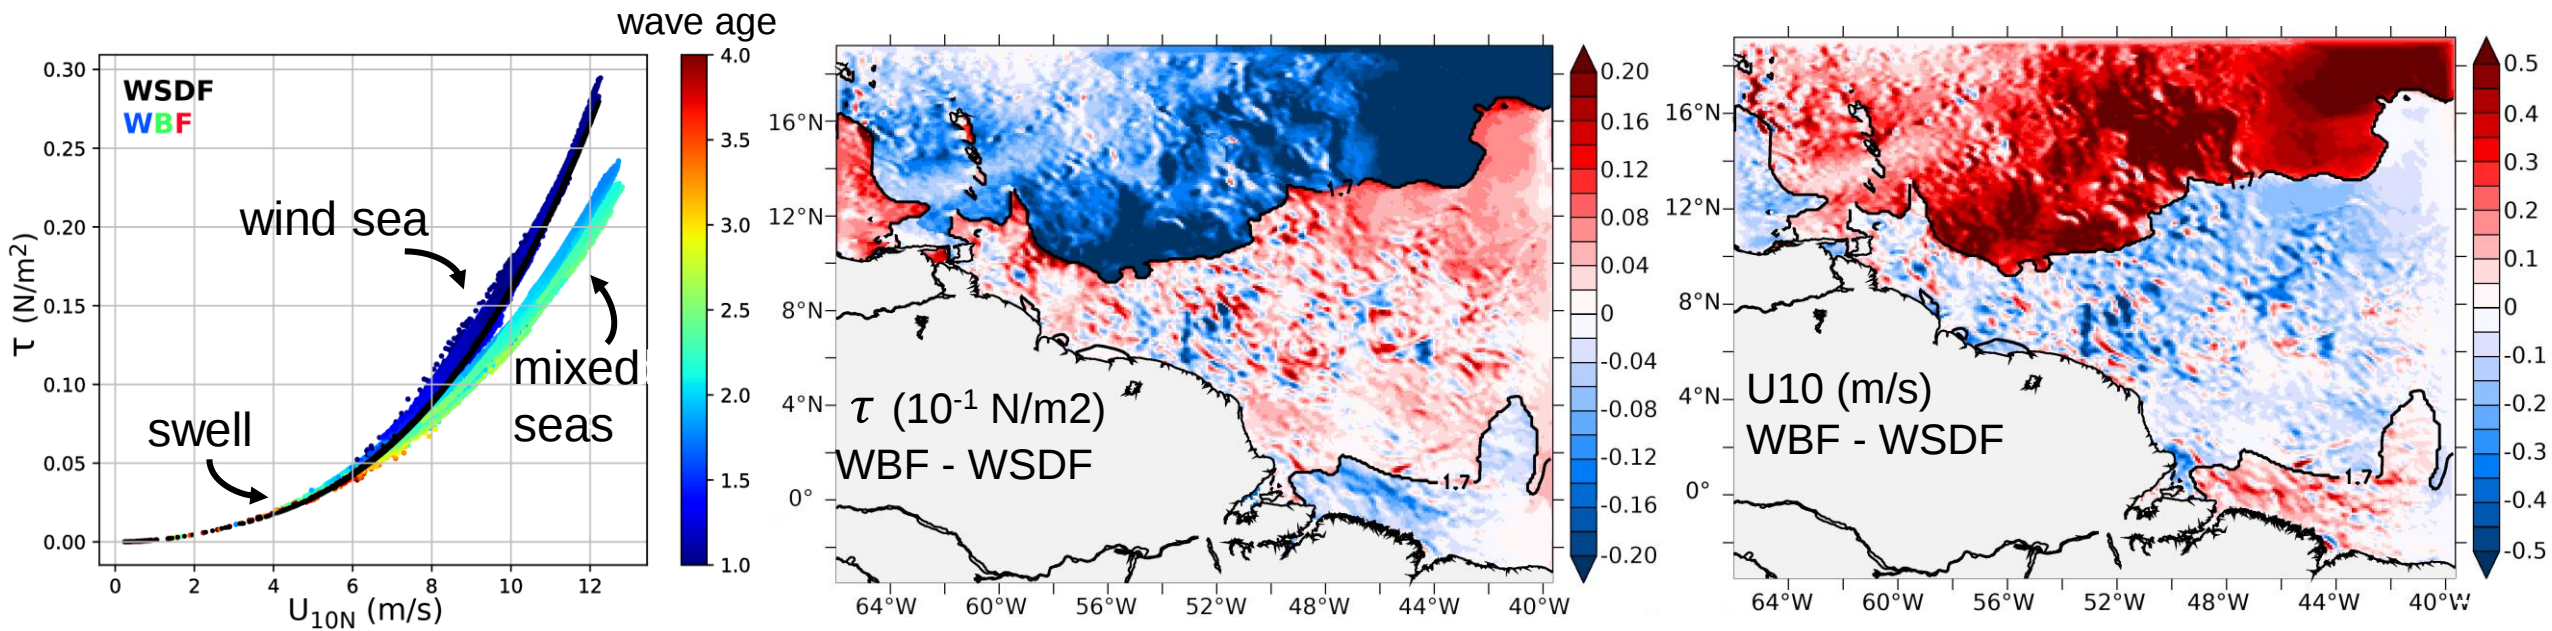



Momentum flux measurements: EUREC4A/ATOMIC

Ron Brown and Ocarina → eddy covariance method

Atalante → inertial dissipation method

SWIFT → estimation of friction velocity from the equilibrium frequency range of the wave spectrum

The model is sample along the gray zone on the map

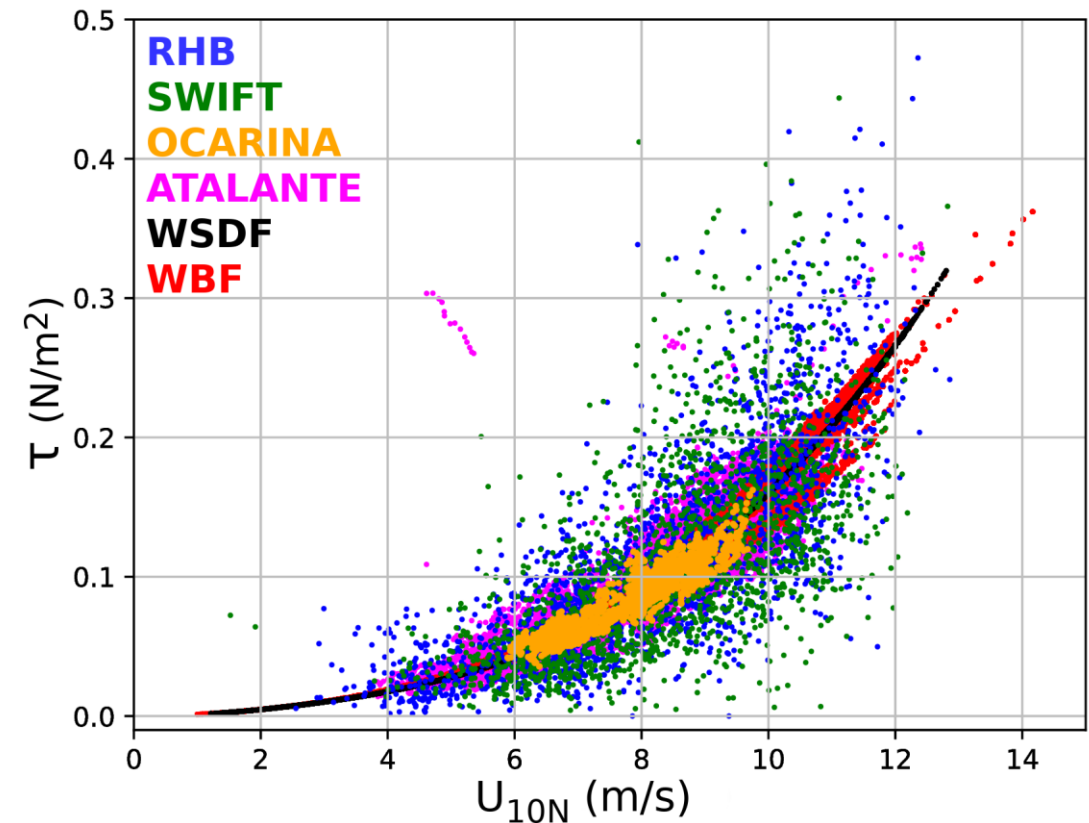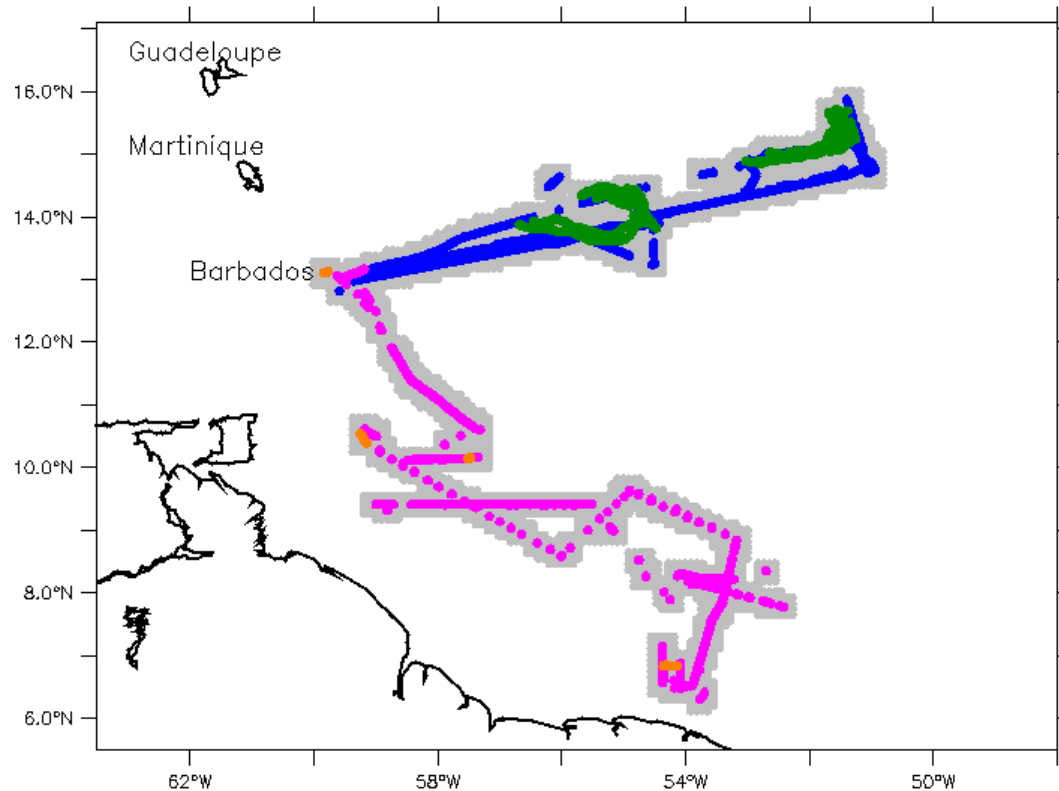

Momentum flux measurements


At a given wind how much of the stress is supported by the different sea states ?

In the observations :

Under **weak wind**, up to ~ 5 m/s, the stress is dominated by **swell**

Between **winds** ~ 5 to ~ 8 m/s the stress is dominated by **mixed sea**

At **higher wind**, above ~ 9 m/s stress is dominated by the **wind sea/equilibrium sea**

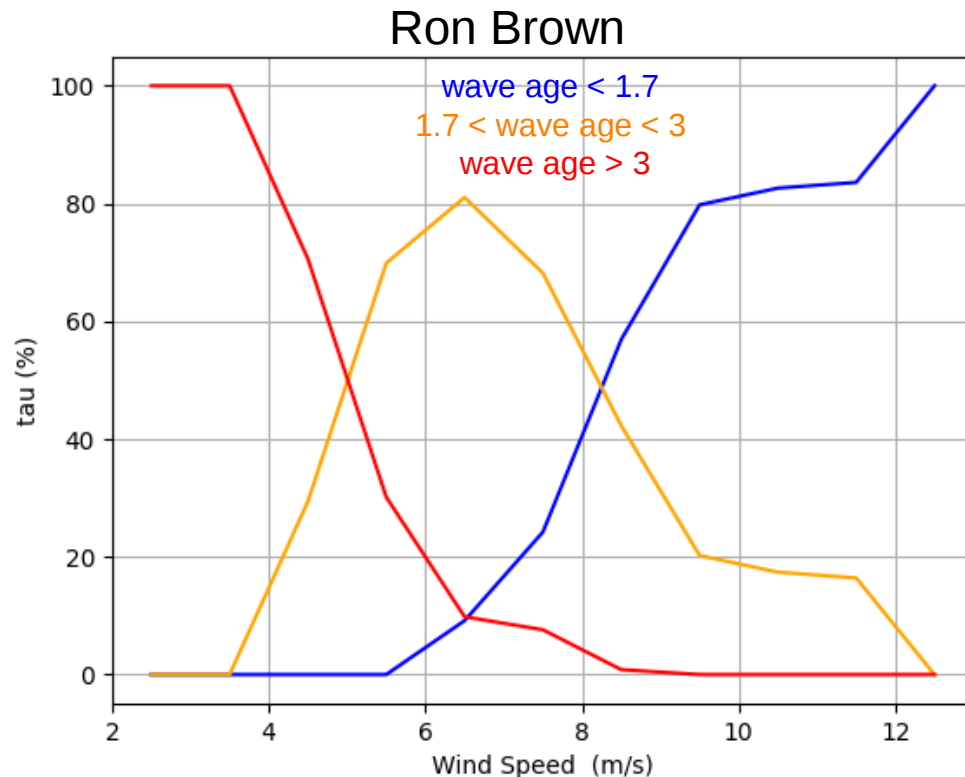

Momentum flux measurements



At a given wind how much of the stress is supported by the different sea states ?

In the observations :

Under **weak wind**, up to ~ 5 m/s, the stress is dominated by **swell**

Between **winds** ~ 5 to ~ 8 m/s the stress is dominated by **mixed sea**

At **higher wind**, above ~ 9 m/s stress is dominated by the **wind sea/equilibrium sea**

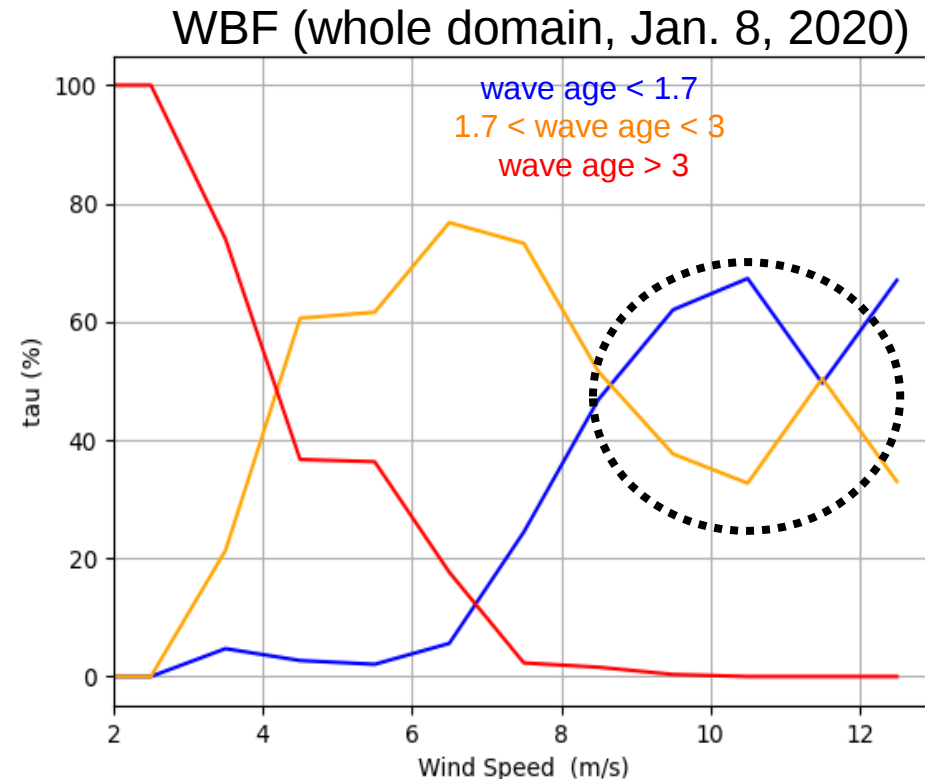
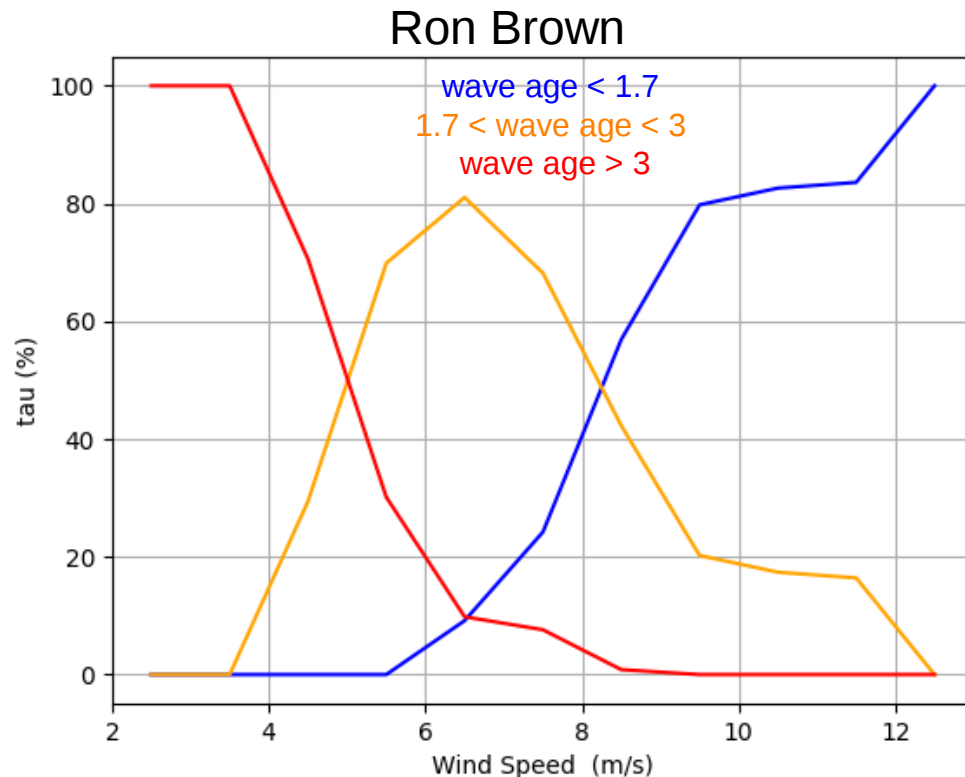


Including waves directionality


The sea state leading to the strong decrease of surface wind stress appears to be strongly misaligned

Wind direction
Peak wave direction

Dominant swell
-> misaligned

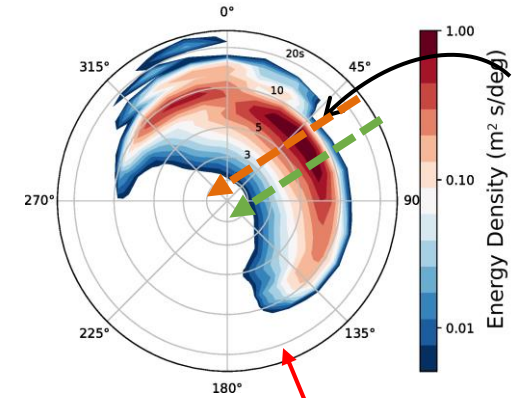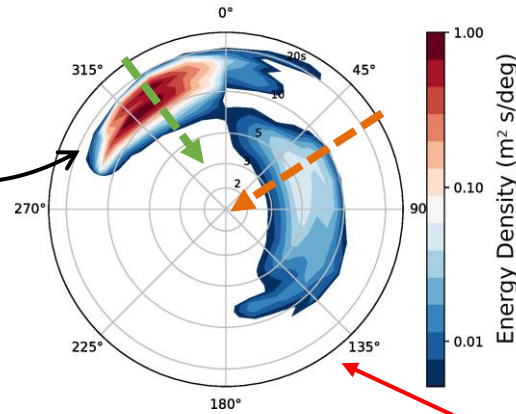

Dominant young and fully developed waves
-> aligned

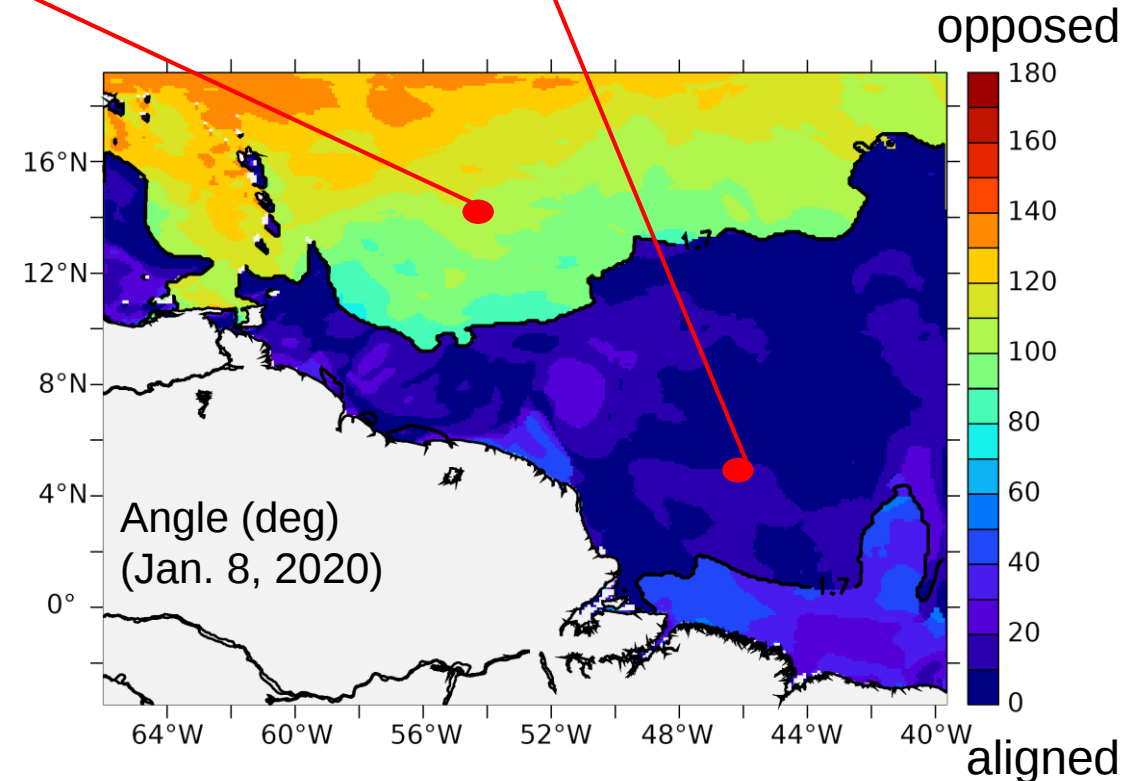



Including waves directionality

The sea state leading to the strong decrease of surface wind stress appears to be strongly misaligned



Wind direction

Peak wave direction

Dominant swell
-> misaligned

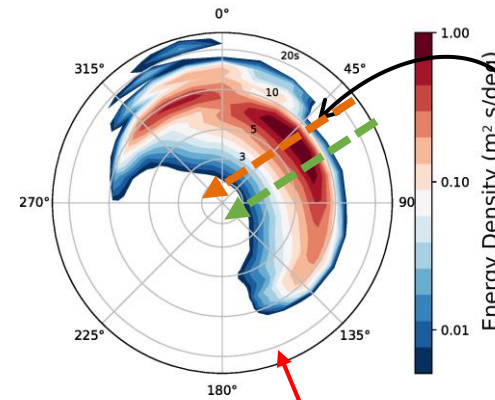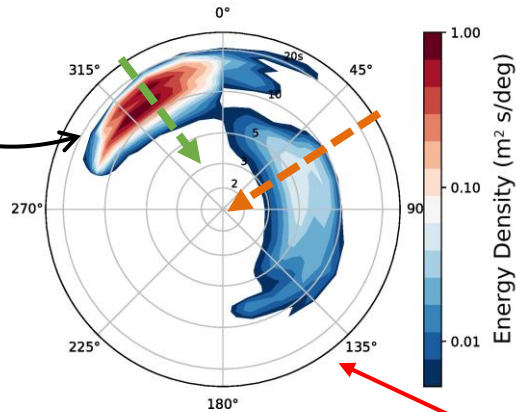

Dominant young and
fully developed waves
-> aligned

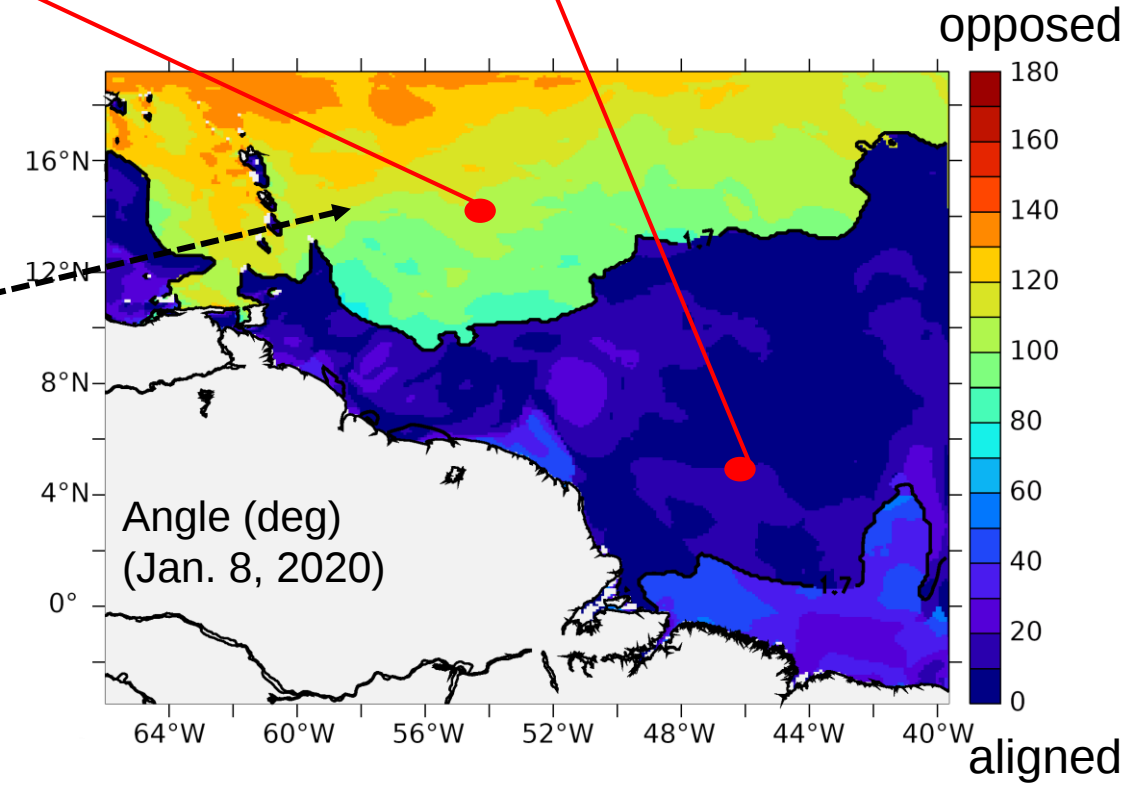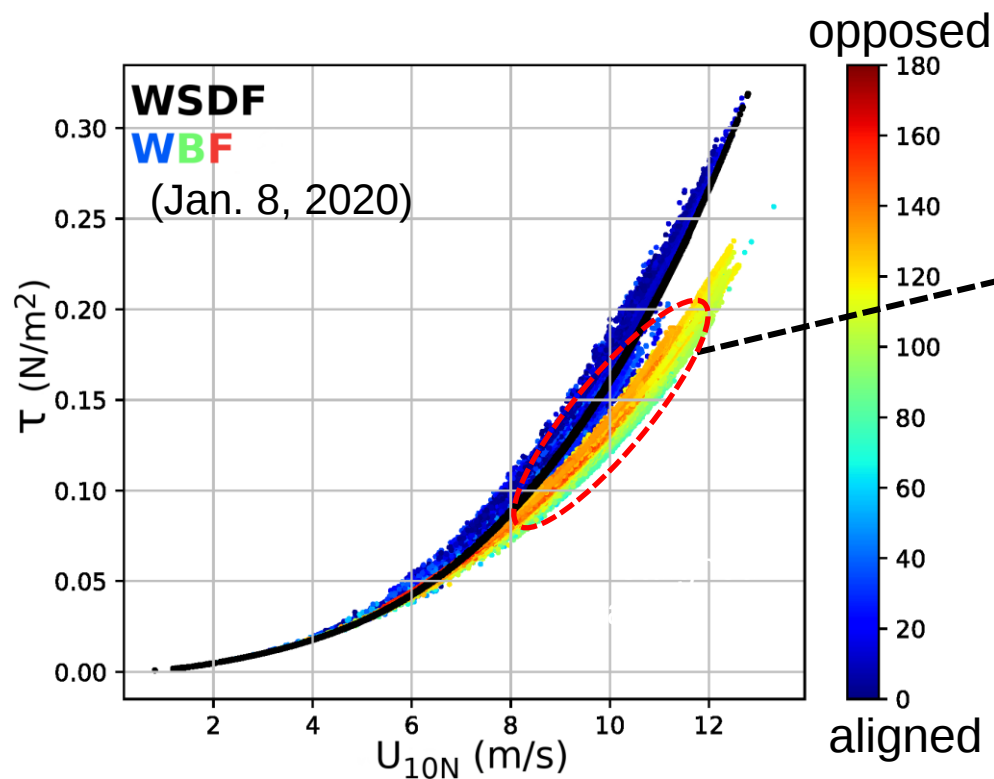


Including waves directionality

The sea state leading to the strong decrease of surface wind stress appears to be strongly misaligned

Based on previous studies (Patton et al. 2015, Porchetta et al. 2019)

$$Z_{rough} = H_s \cdot 0.09 \cos(0.4\theta) \cdot \left(\frac{u_*}{C_p} \right)^{2 \cos(0.32\theta)}$$

Where θ varies from 0 to 180

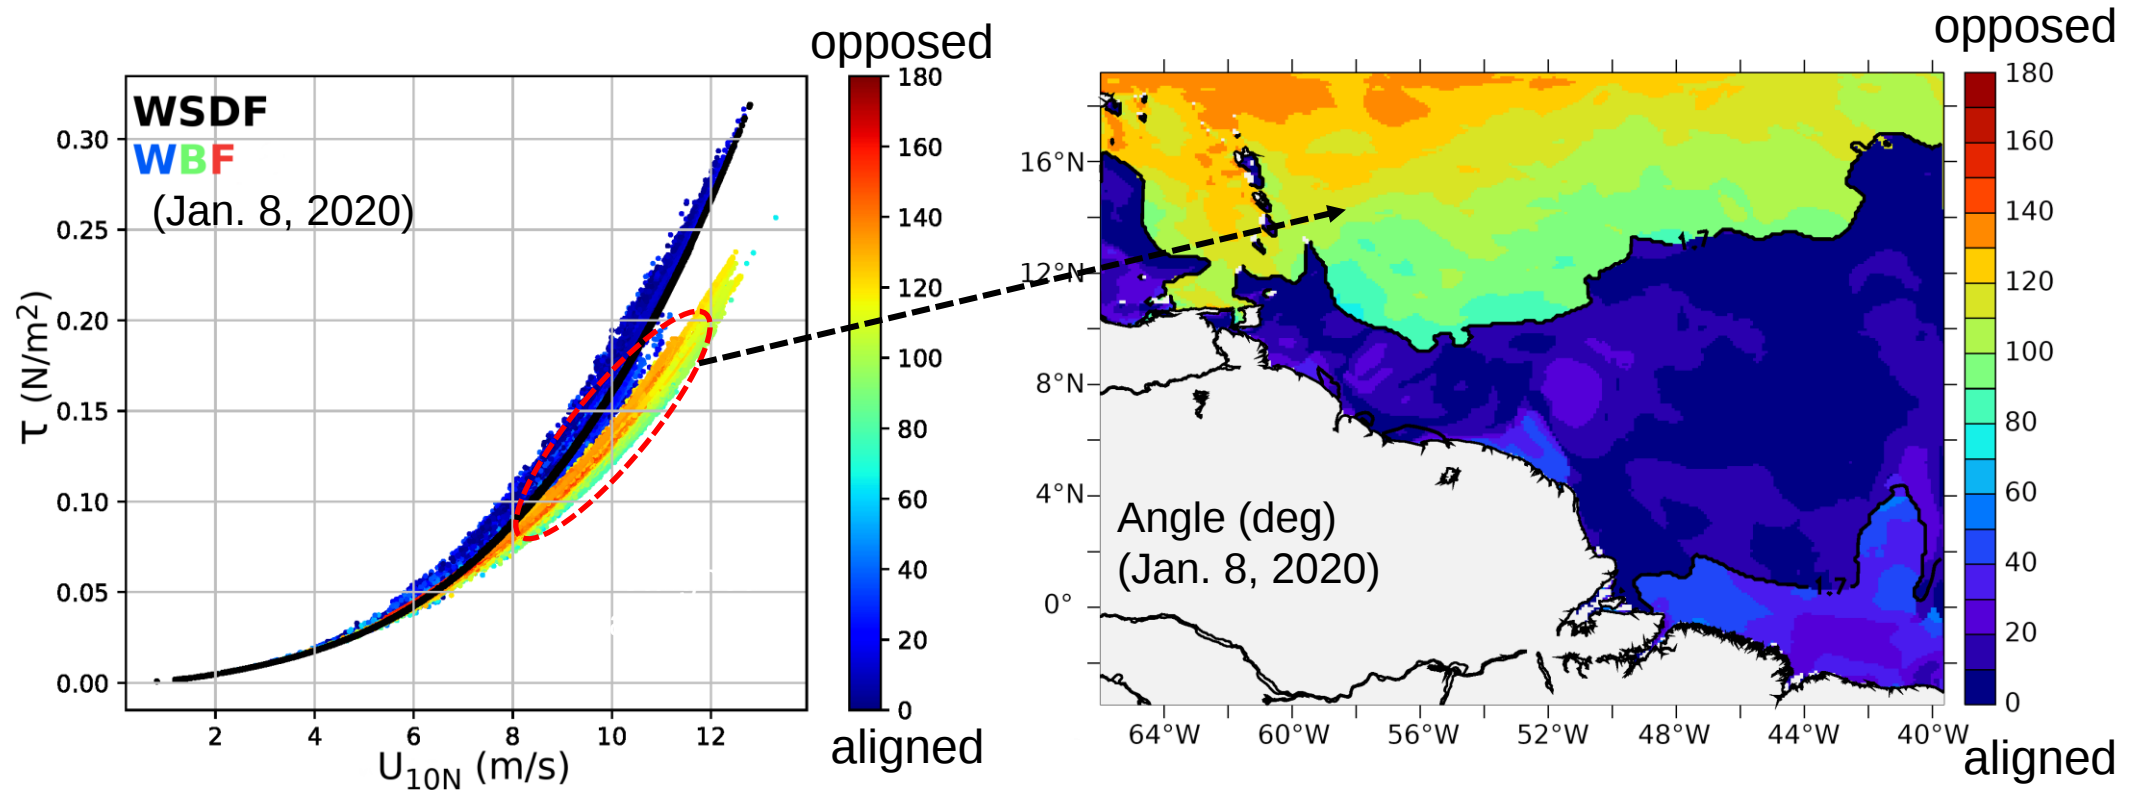



Including waves directionality

The sea state leading to the strong decrease of surface wind stress appears to be strongly misaligned

Based on previous studies (Patton et al. 2015, Porchetta et al. 2019)

$$\tau_{rough} = H_s \cdot 0.09 \cos(0.4\theta) \cdot \left(\frac{u_*}{C_p} \right)^{2 \cos(0.32\theta)}$$

Where θ varies from 0 to 180

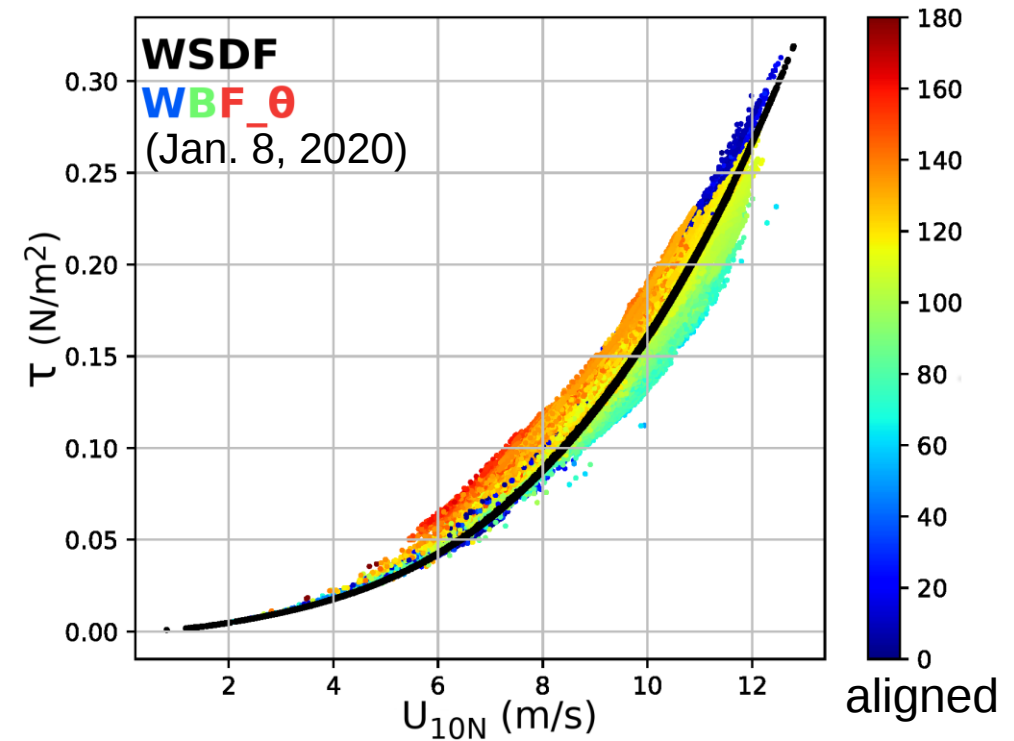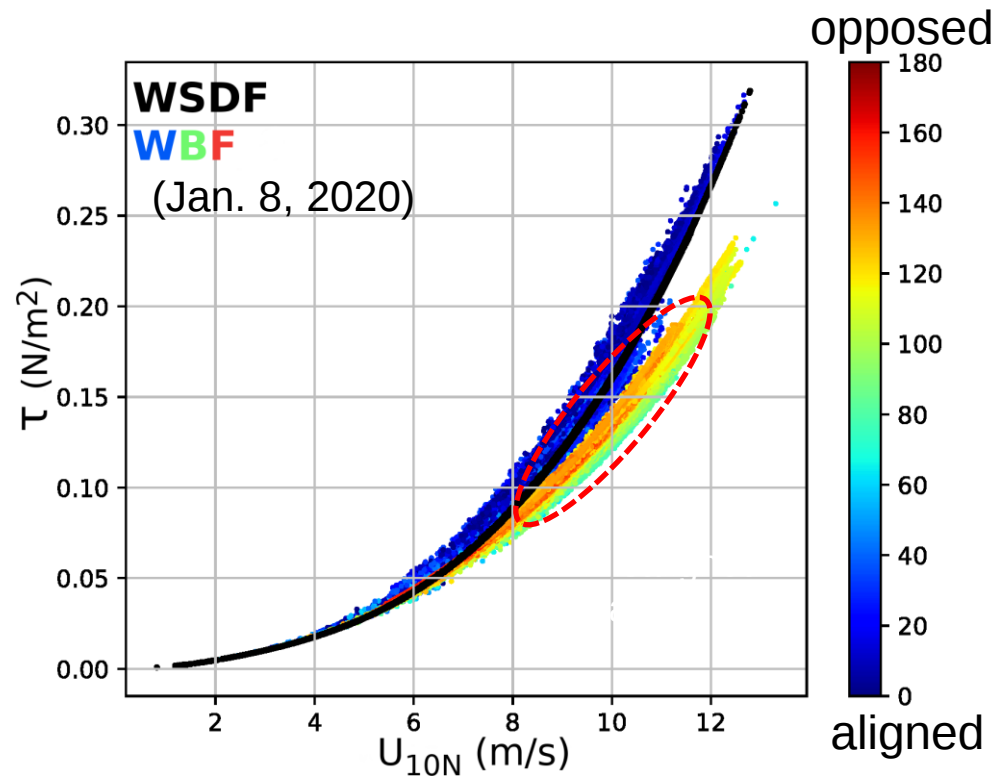

Conclusions of 1st part

Investigating the impact of sea state on momentum flux through coupled Ocean-Atmosphere-Wave simulations using the sea surface fluxes parameterization COARE3.5

→ COARE3.5 wave-based formulation tends to over-emphasizes the mixed seas and swell impacts on momentum flux.


→ Two possible remedies for low stress bias:

- Wave-wind directional misalignment ($\theta \neq 0$): increases the drag for misaligned waves
- Mean wave period (T_m): emphasizes the presence of wind waves in the mixed sea state

Misaligned Waves During Atmospheric Cold Fronts

They are characterized by high wind speed, abrupt veering, and rapid translation.

→ Leads to strongly misaligned waves behind the cold front


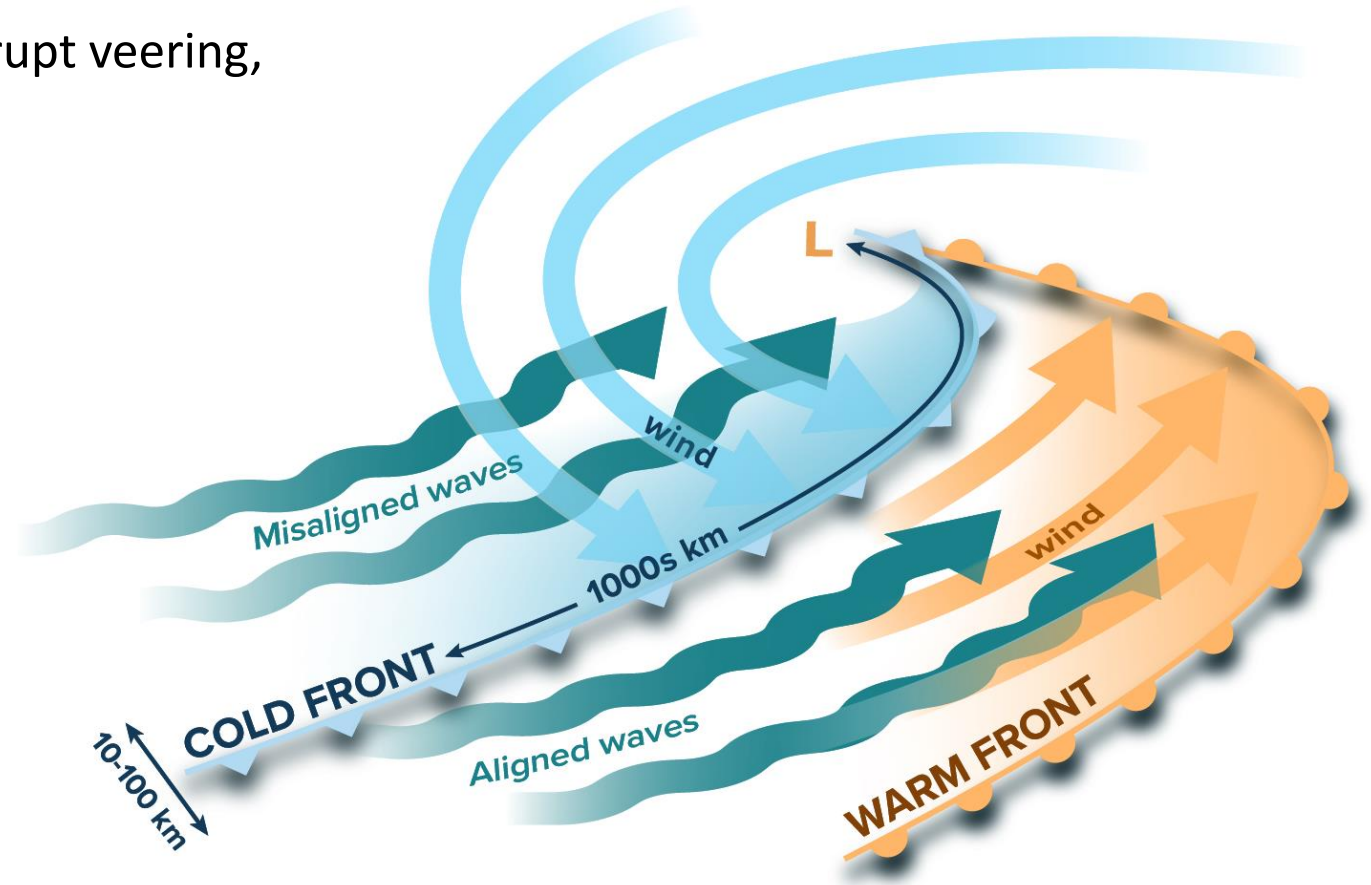


Misaligned Waves During Atmospheric Cold Fronts

They are characterized by high wind speed, abrupt veering, and rapid translation.

→ Leads to strongly misaligned waves behind the cold front

Atmospheric cold fronts account for ~15% of the time during winter months in the North Atlantic Ocean.

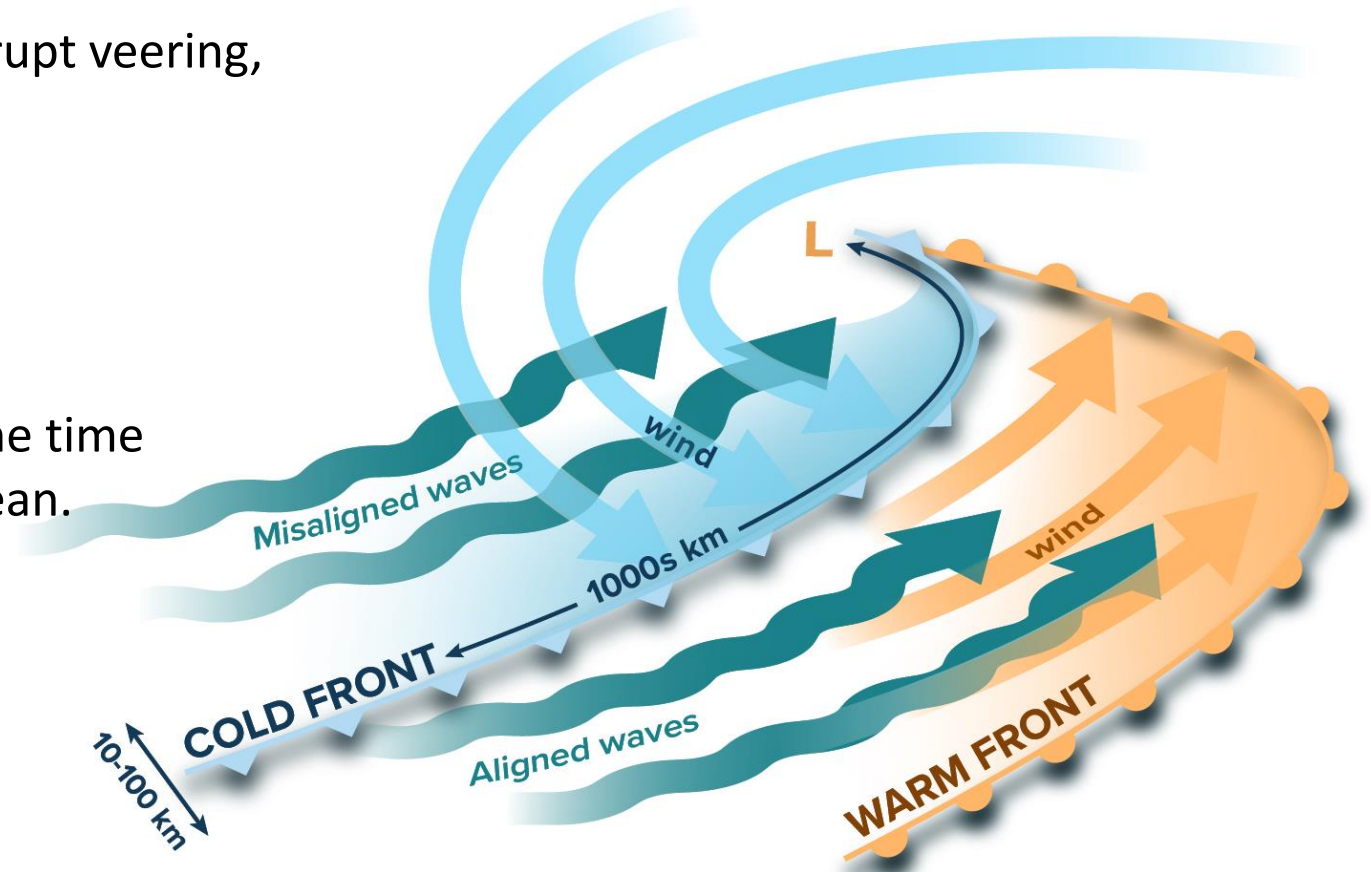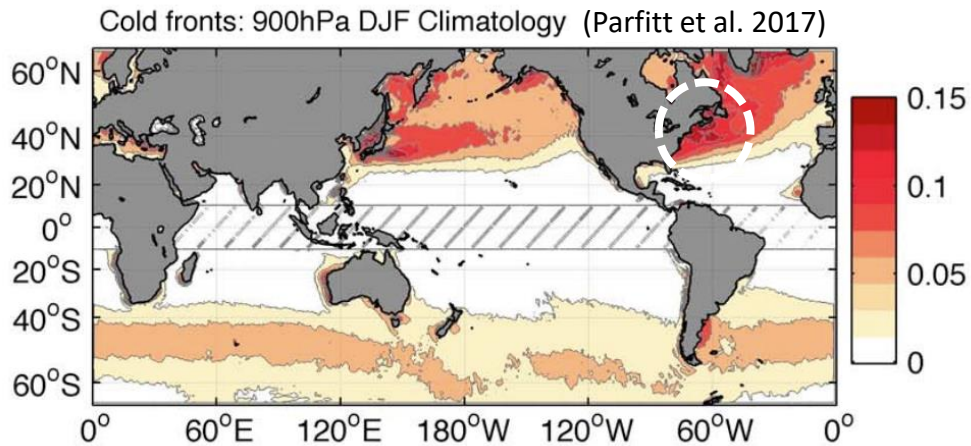

Coupled Modeling and Observation

SCOAR Regional Coupled Modeling (Seo et al. 2007)

WRF nested configuration, with an OUTER domain at 7.5 km




WRF-ROMS-WW3 COUPLED domain at 1.5 km

Wave based formulation + wave directionality (**WBF0**)

Wave based formulation (**WBF**)

Ocean Observatories Initiative


Pioneer Array (2014-2022)

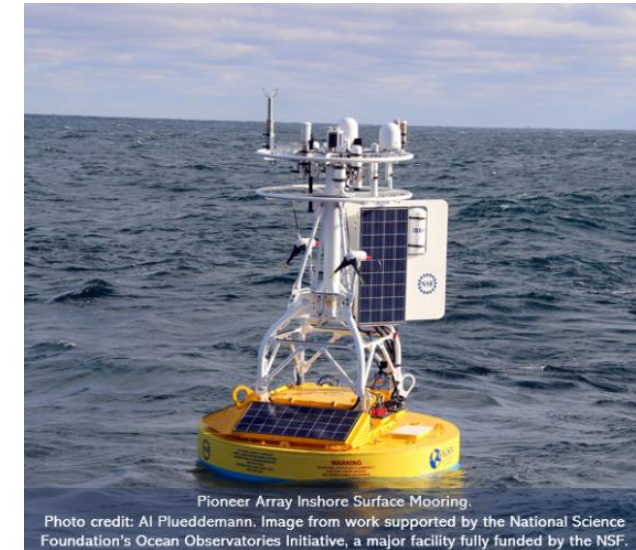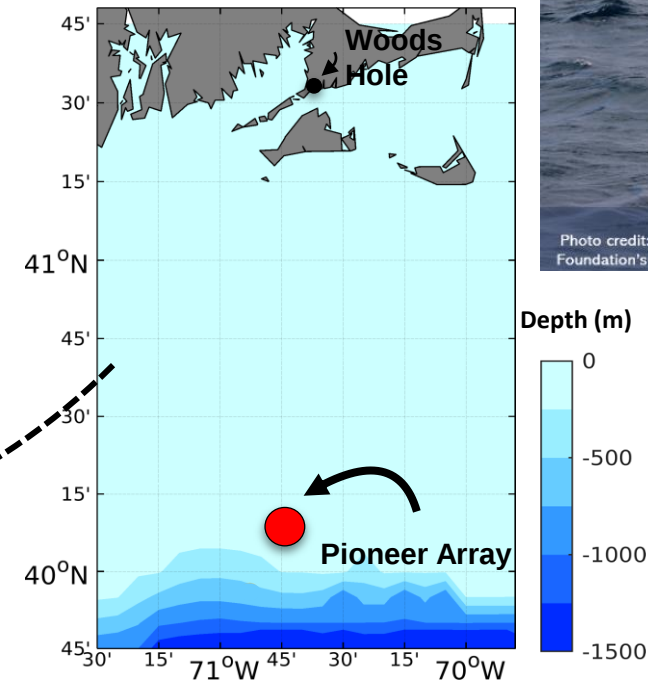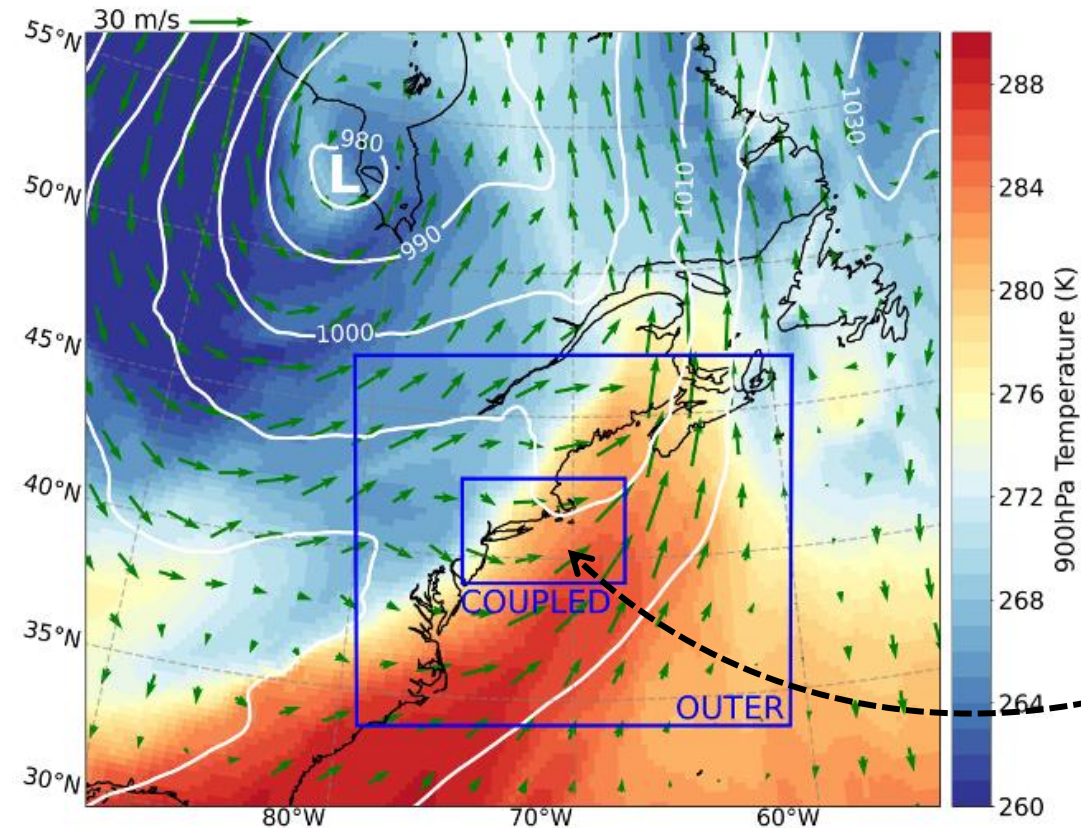



Atmospheric cold front passing on December 6th 2017

Aligned waves under the warm front

Strongly misaligned waves under the cold front


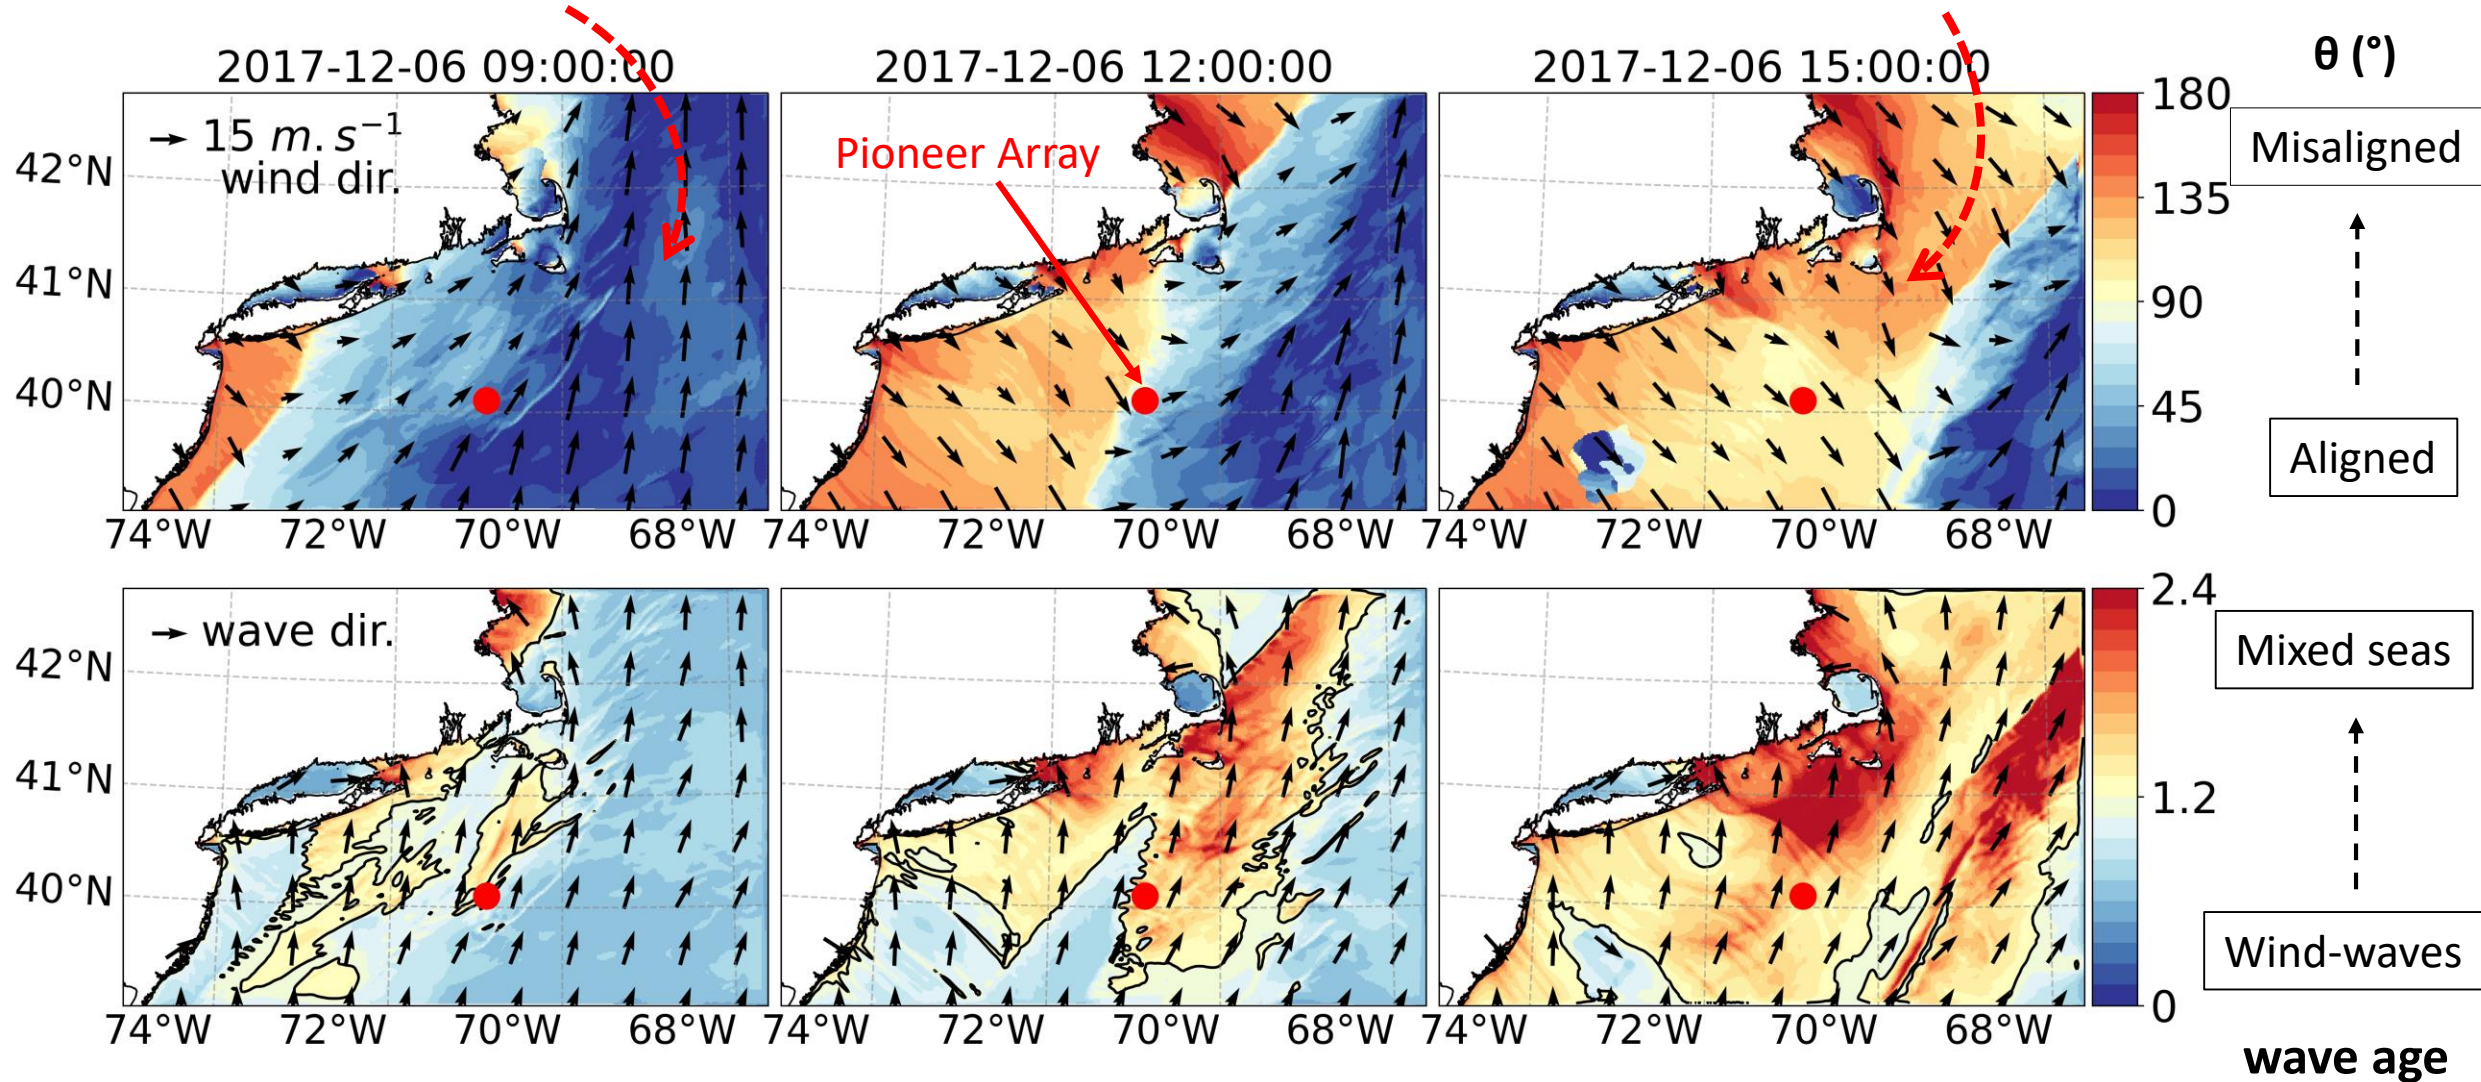


Ocean Observatories Initiative: Pioneer Array (PIO)

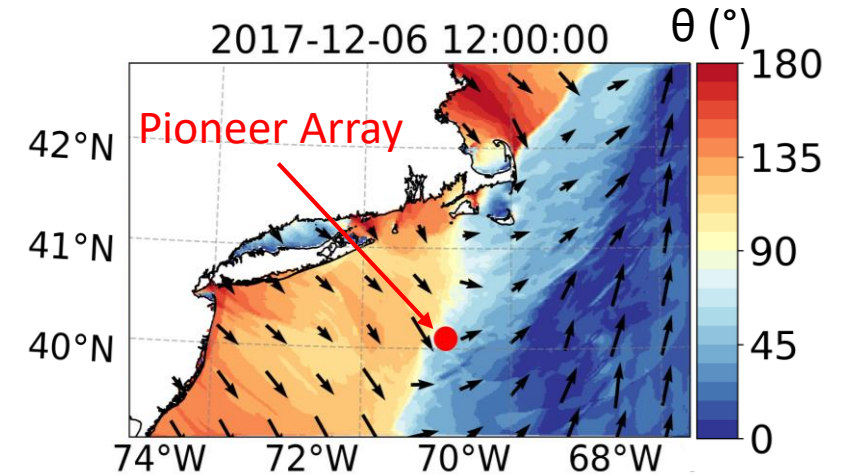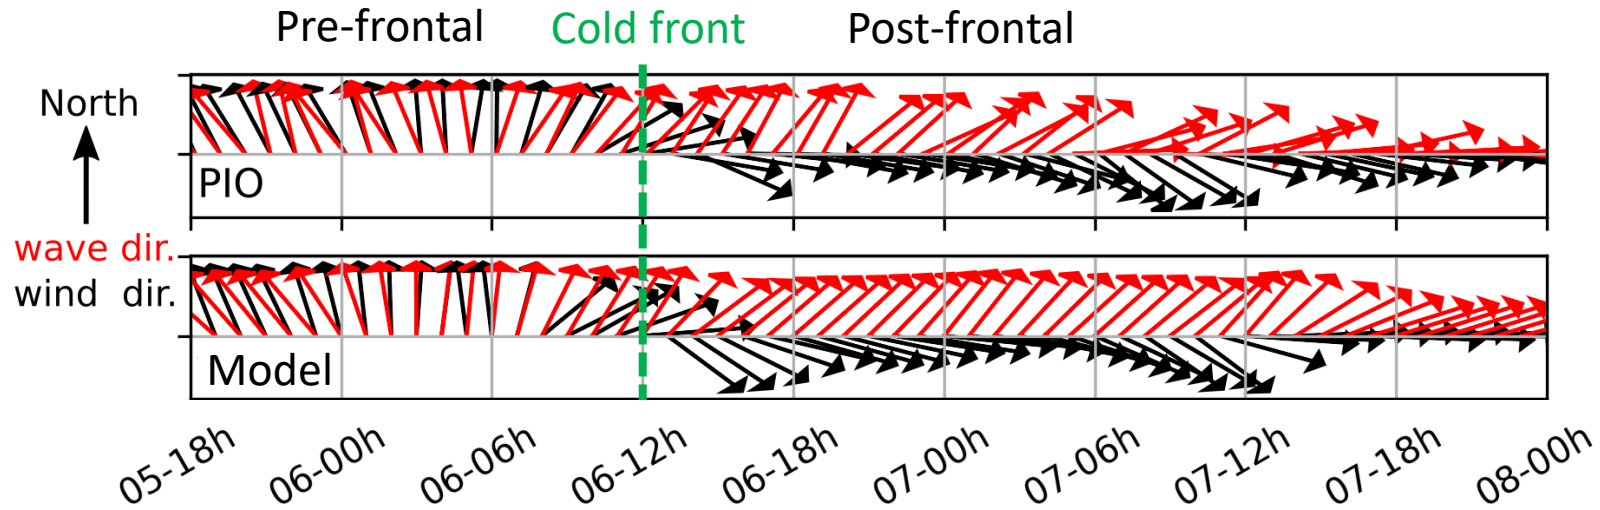

Waves stayed strongly misaligned more than 12h hours after the passage of the cold front ..!



Ocean Observatories Initiative: Pioneer Array (PIO)

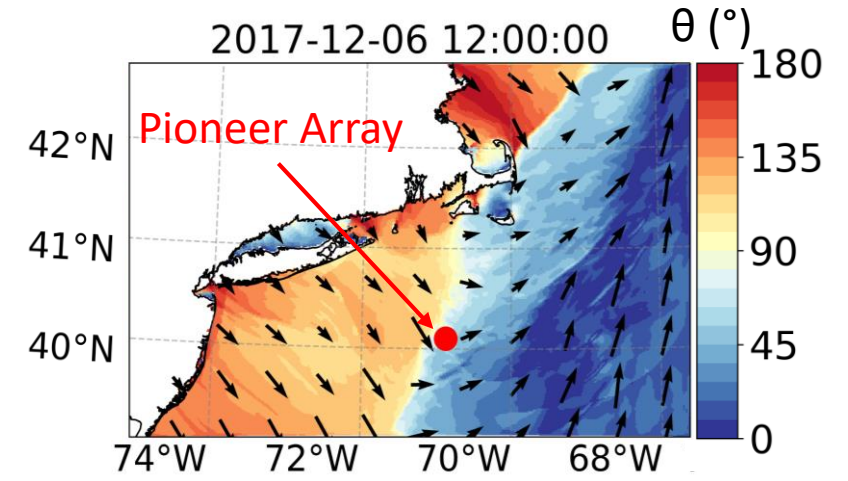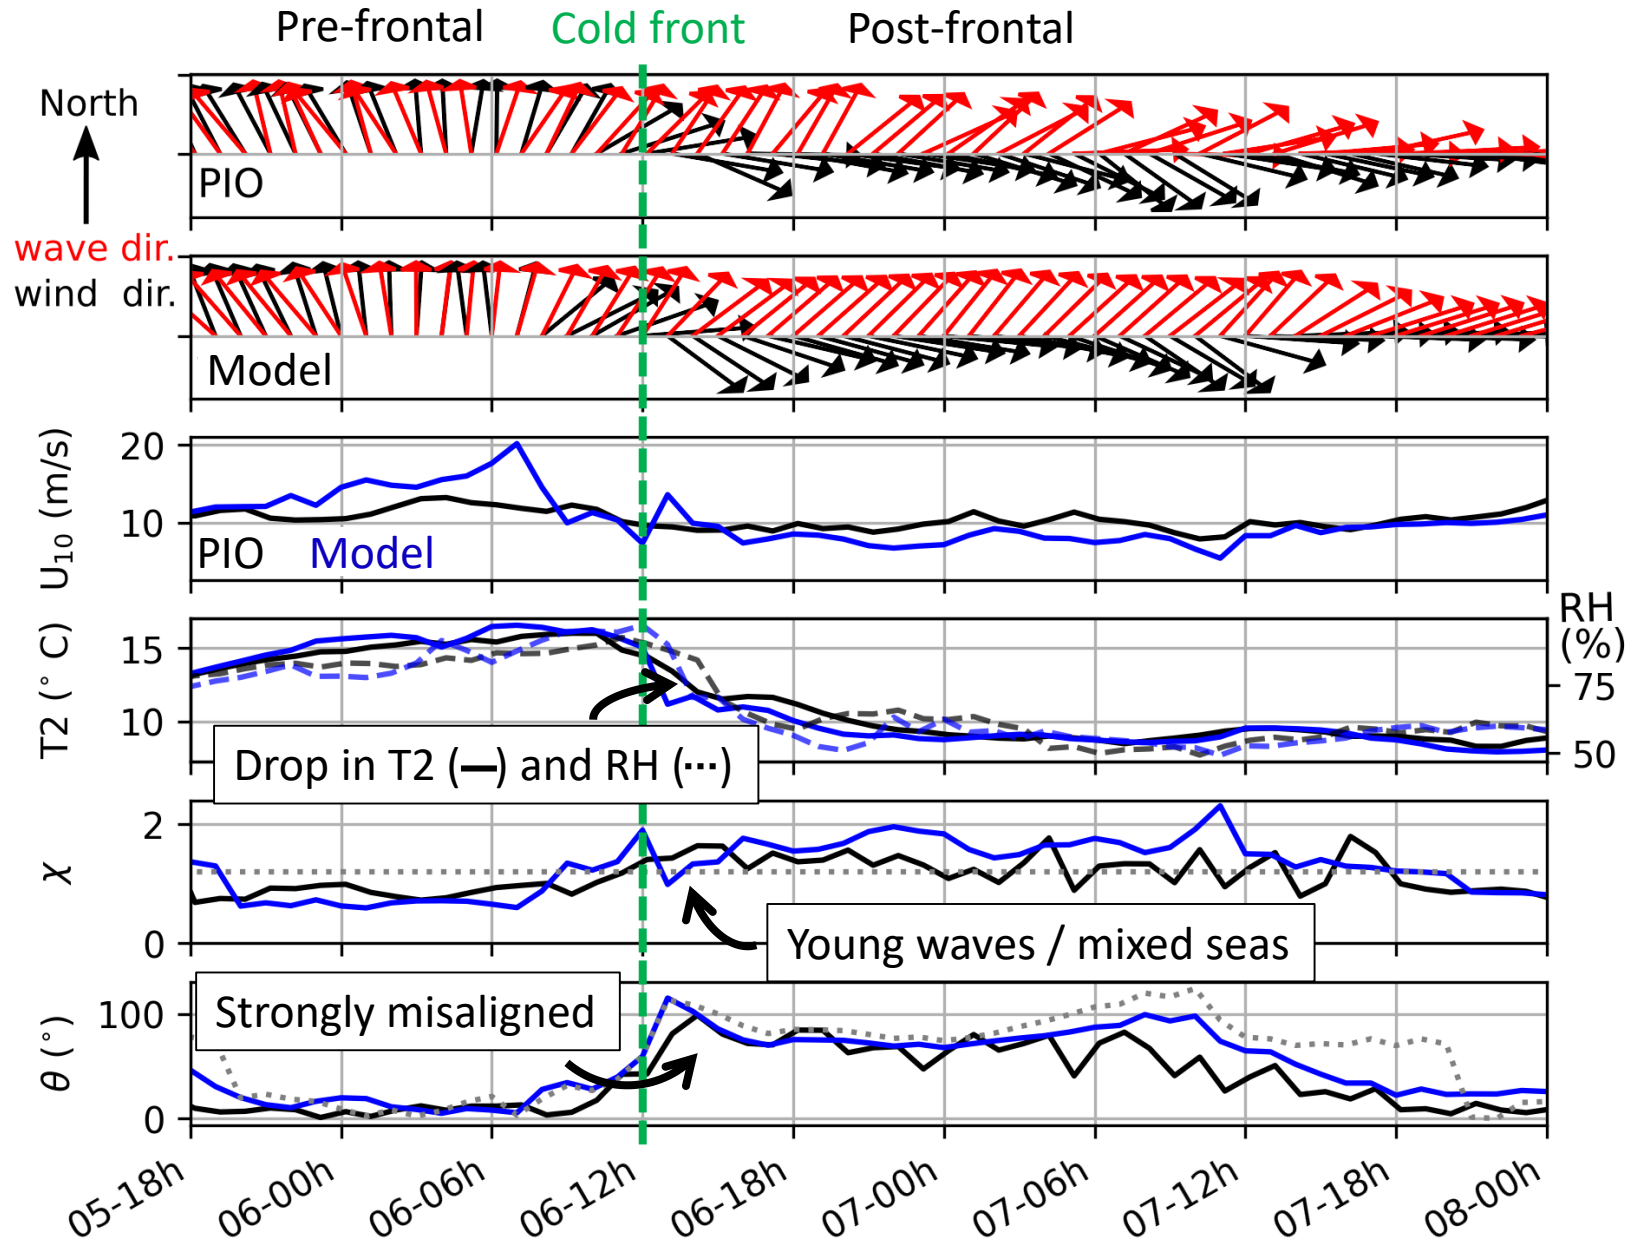

Waves stayed strongly misaligned more than 12h hours after the passage of the cold front ..!

Misaligned waves impact on momentum flux


2017-12-06-15:00

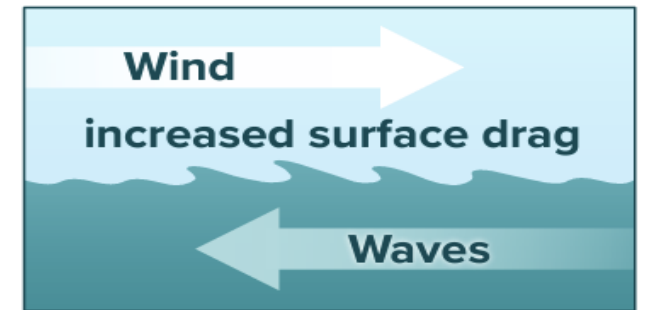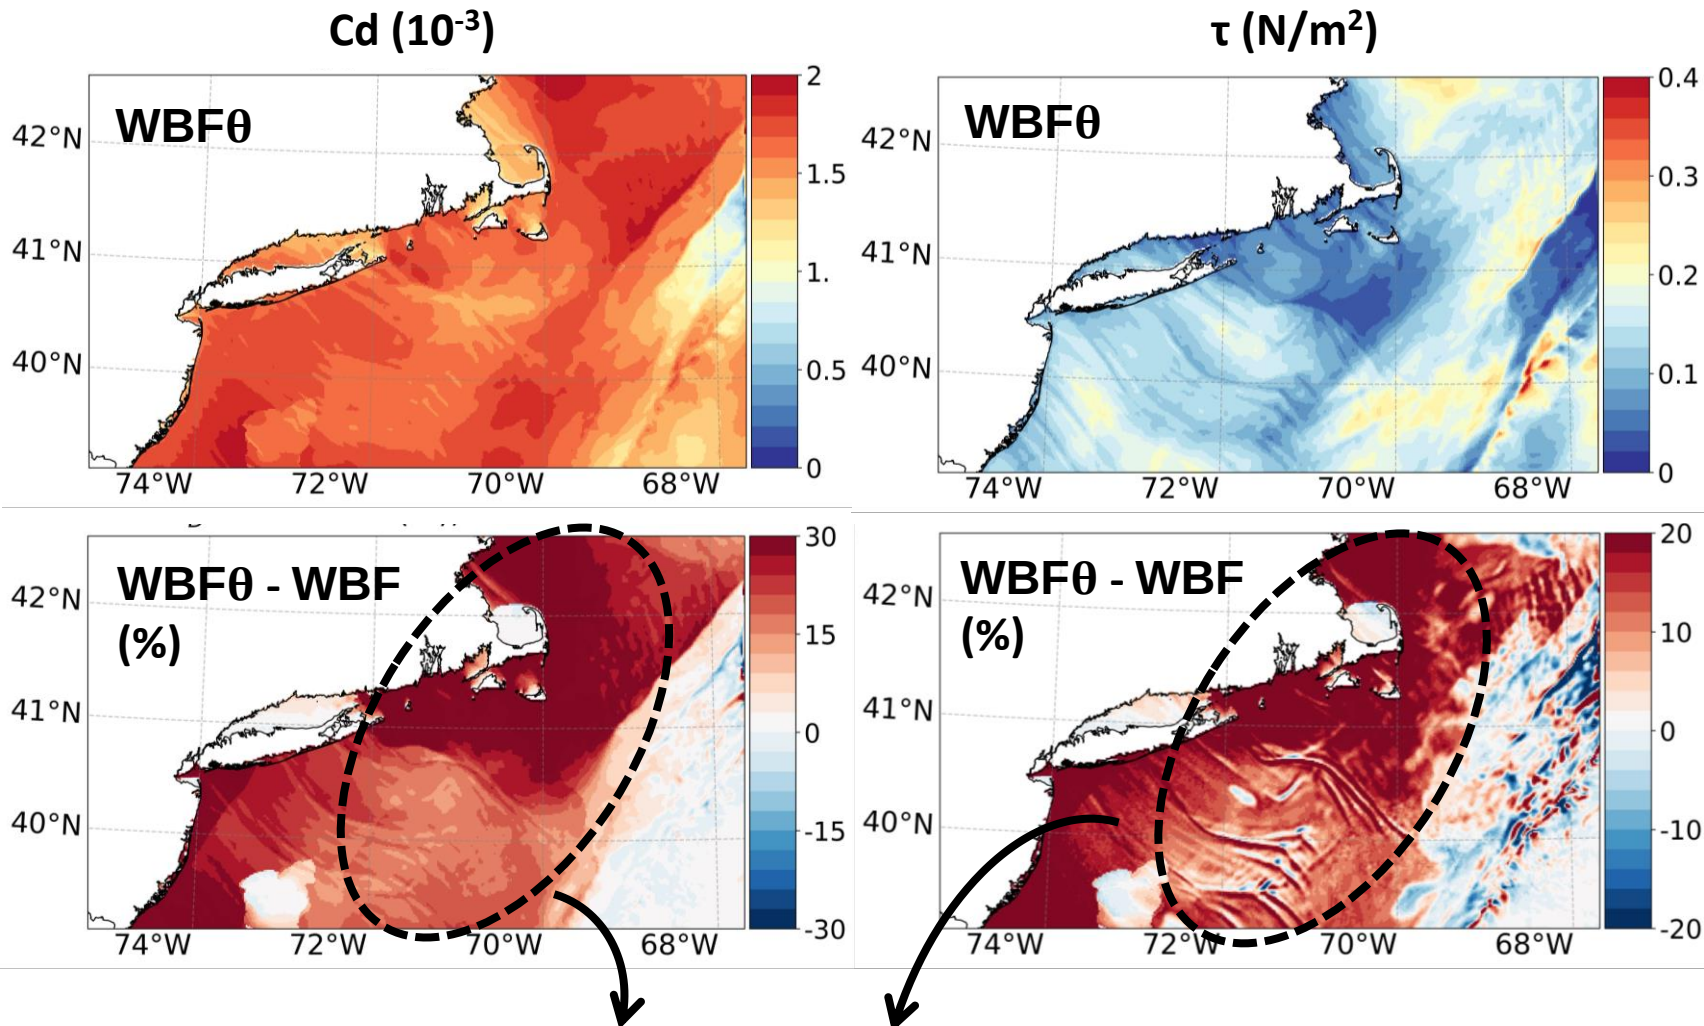

Surface drag coefficient and momentum stress increase by 20% and 11% on average behind the cold front

Misaligned waves impact on momentum flux



2017-12-06-15:00

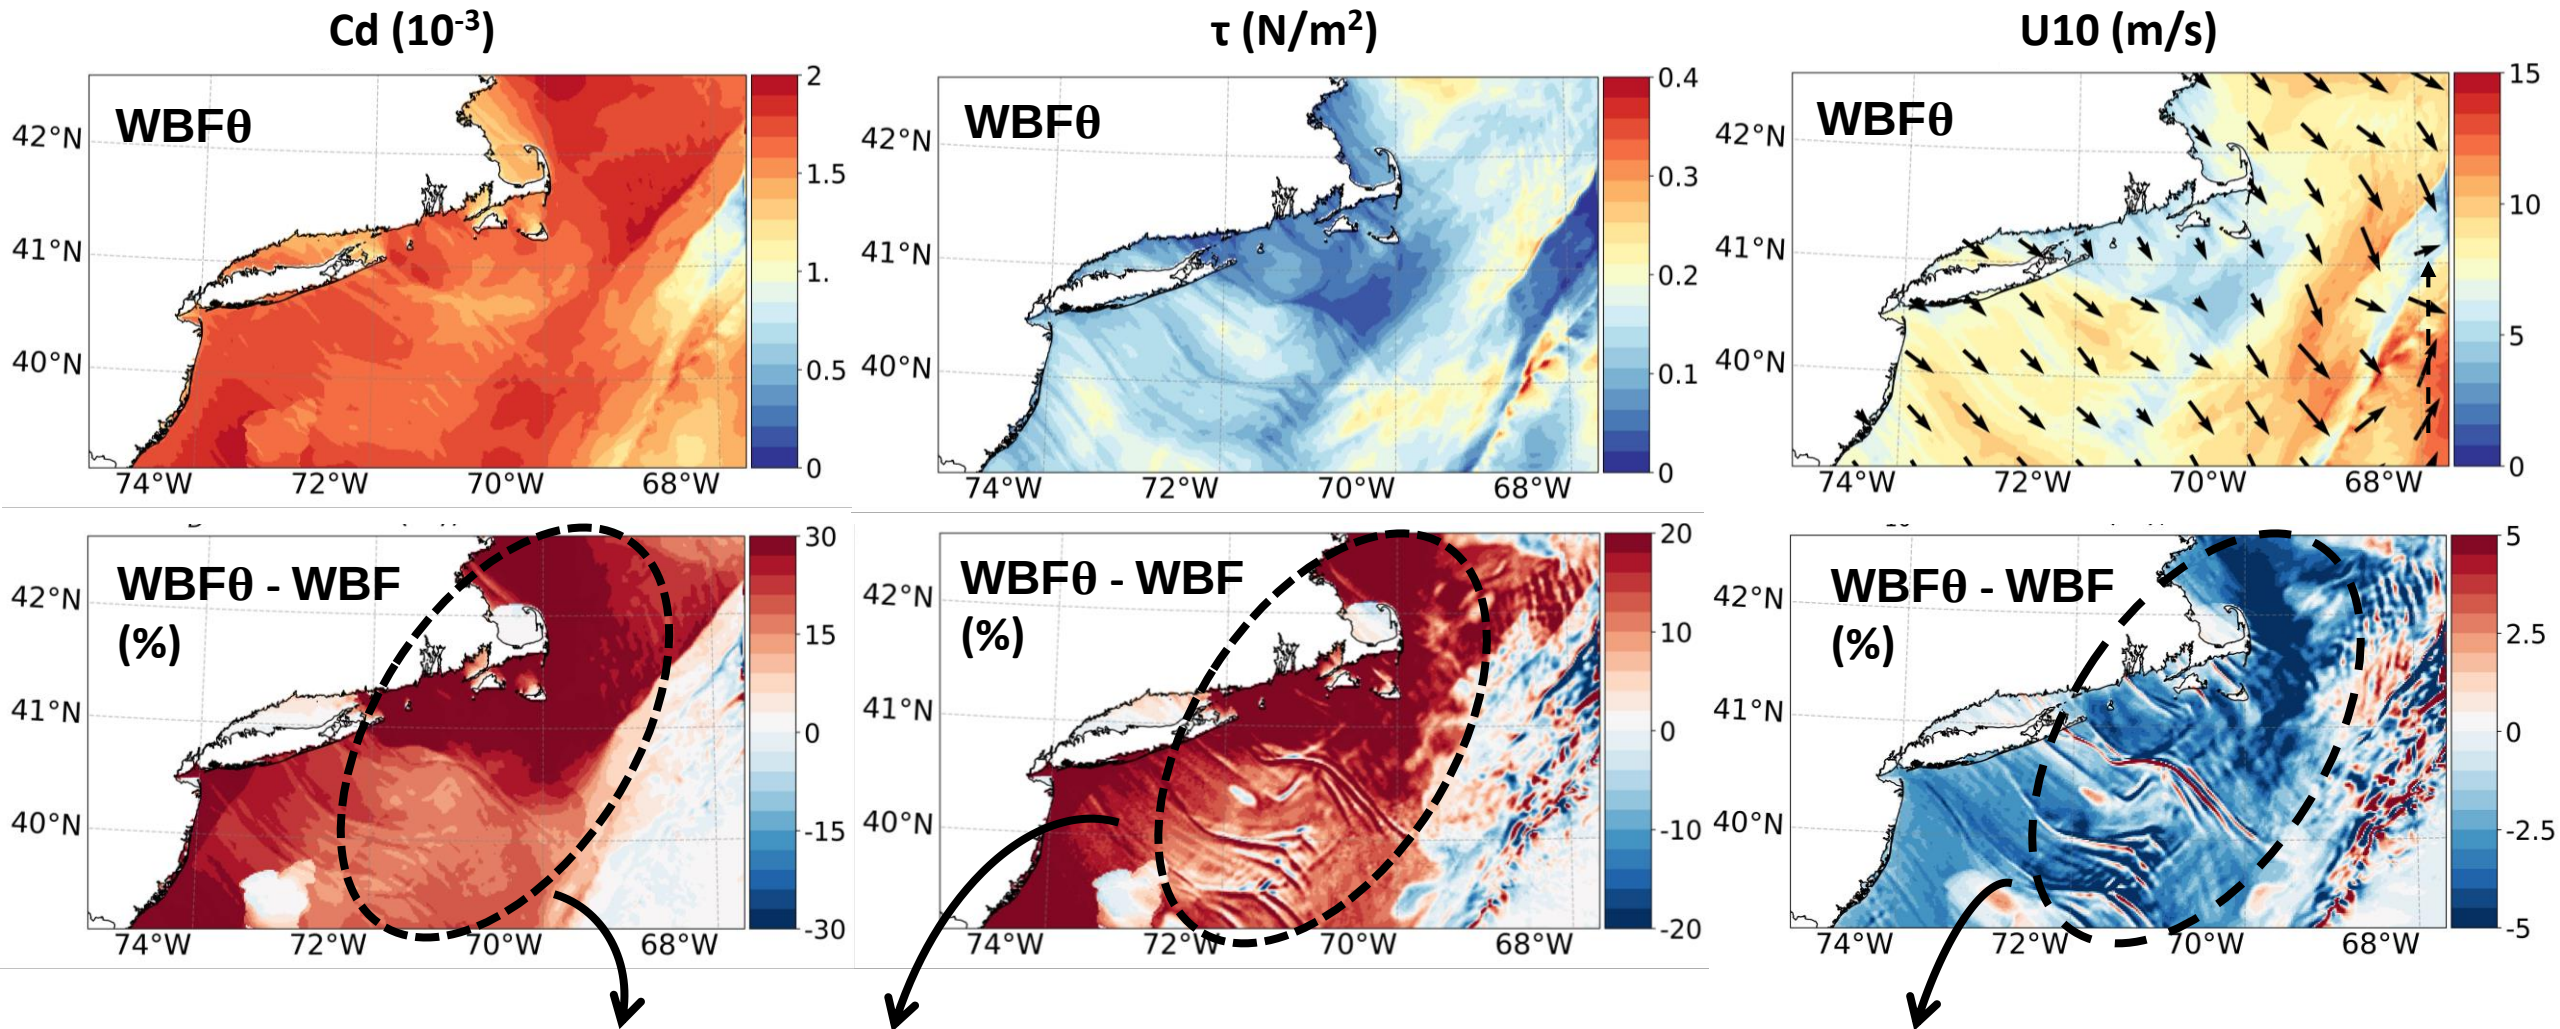

Surface drag coefficient and momentum stress increase by 20% and 11% on average behind the cold front

Direct impact on the surface wind speed which decreases by 2% on average

Direct covariance flux system measurements at Pioneer Array

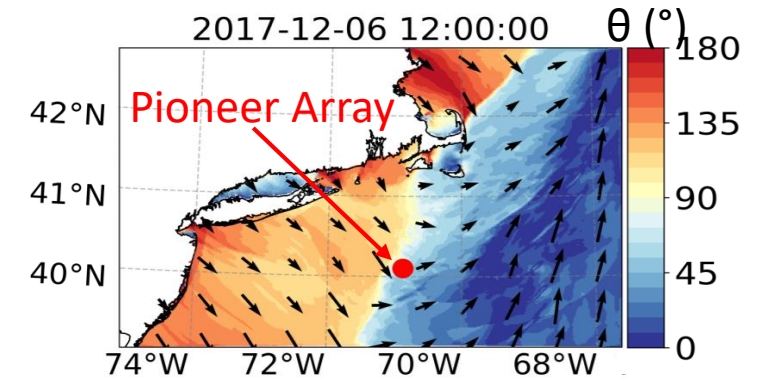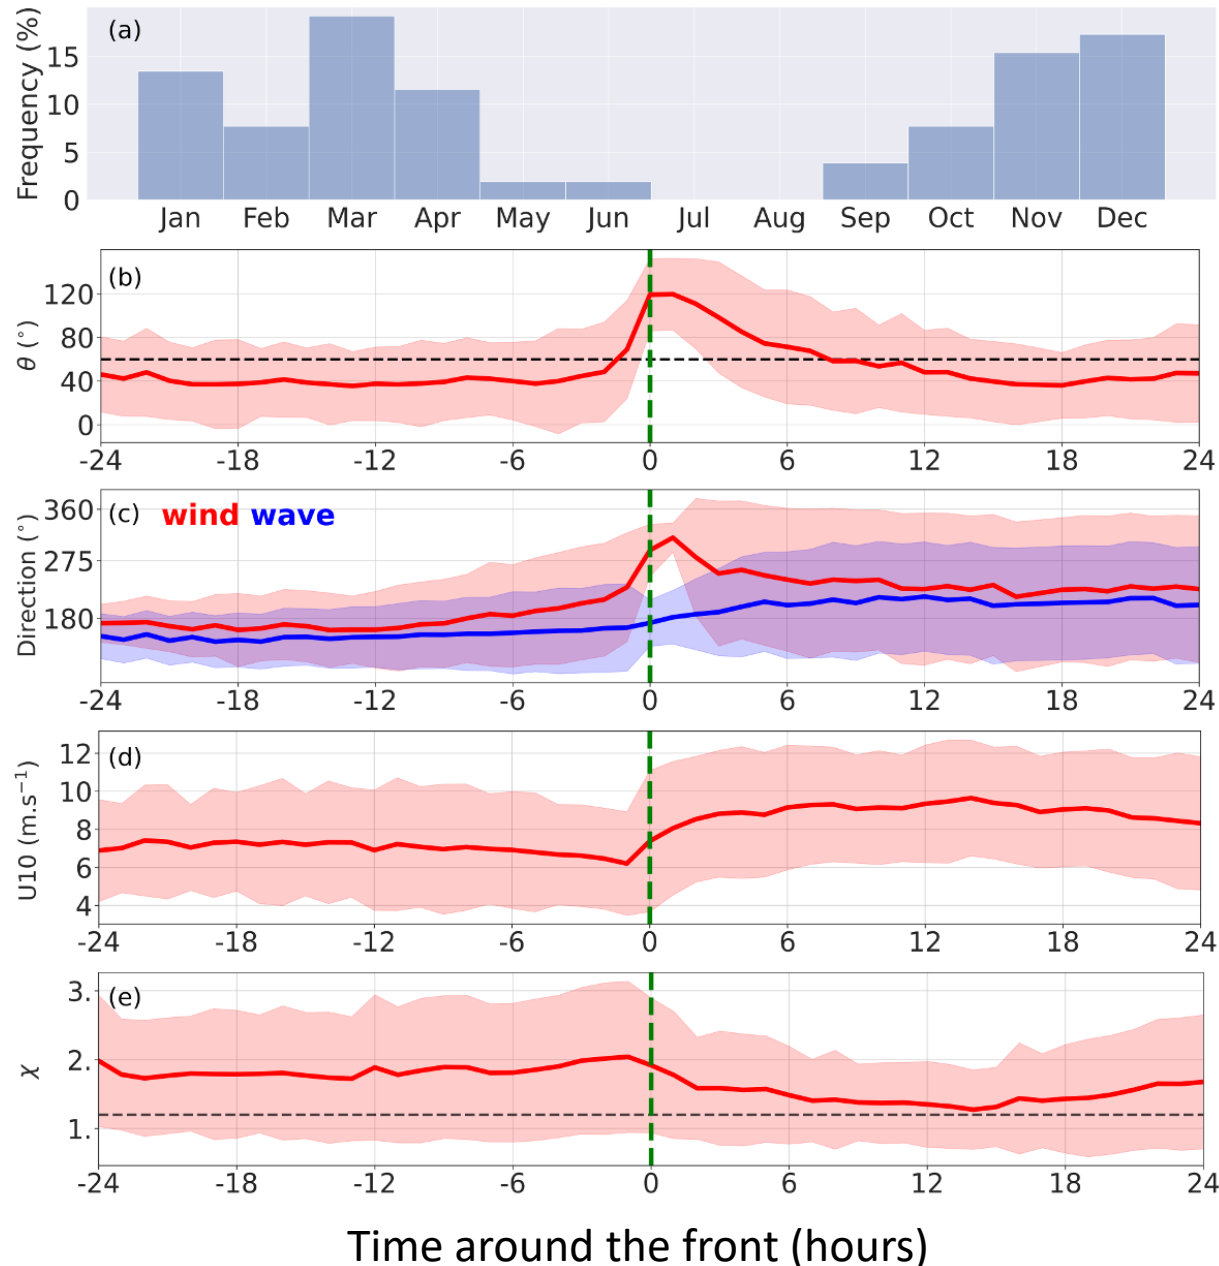


Most of the cold fronts occur during the extended winter months, November-March

80% of the detected cold fronts lead to strongly misaligned waves ($\theta > 60^\circ$ = misaligned).

Waves can stay misaligned between 5h to 10h after the passage of the cold front.

Direct covariance flux system measurements at Pioneer Array

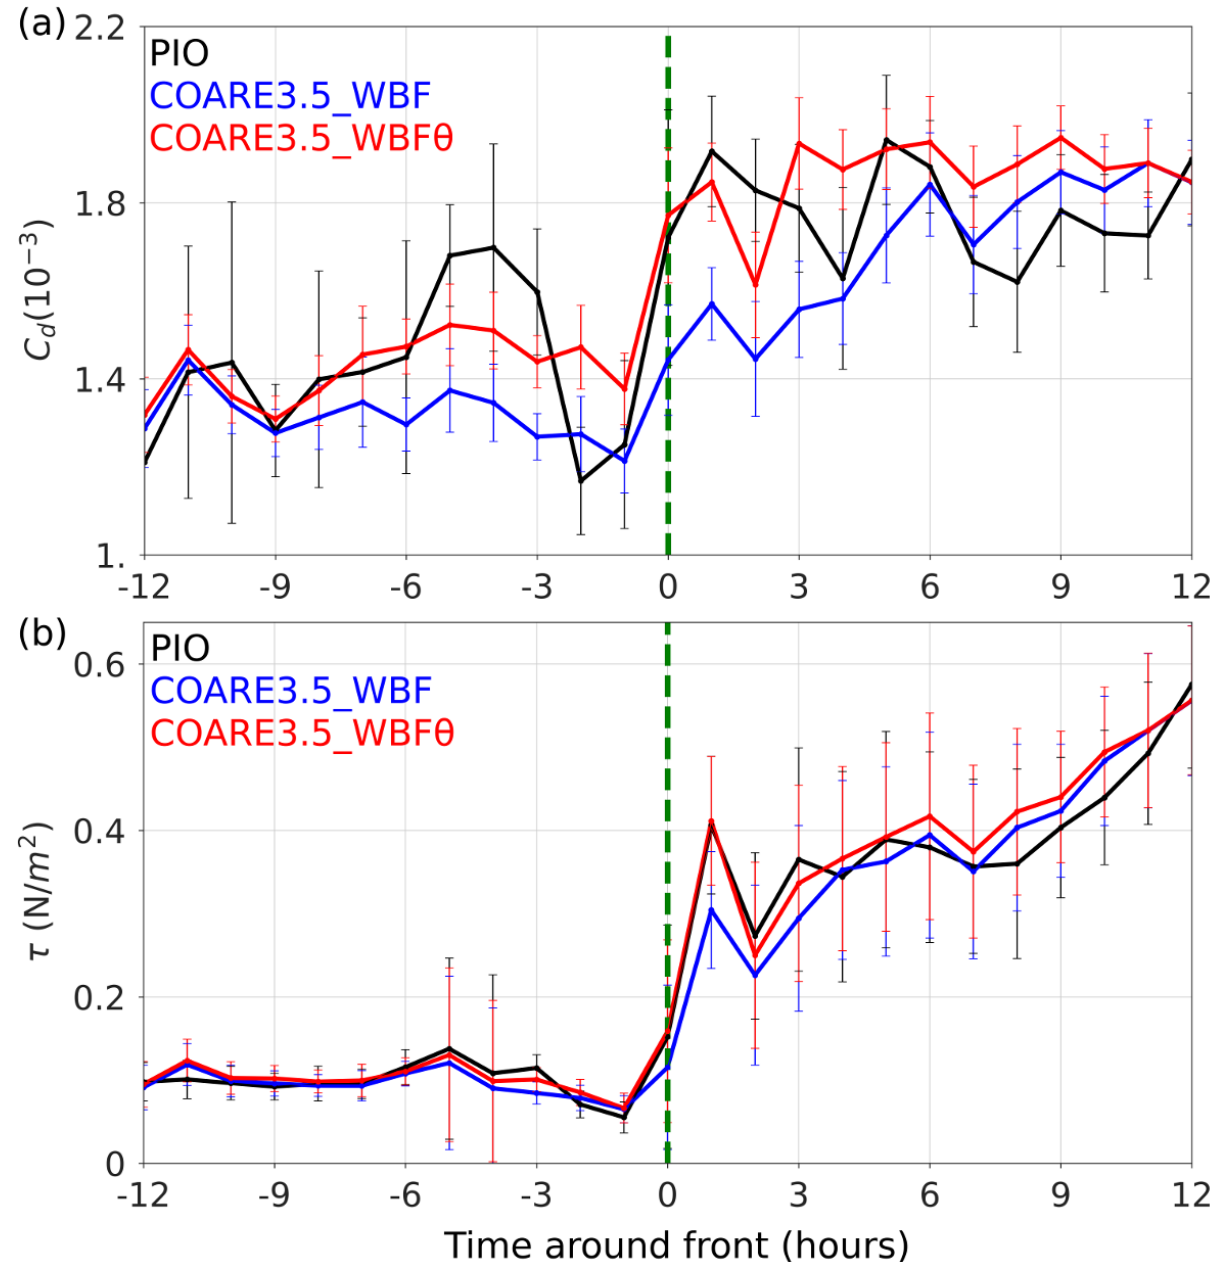

20 atmospheric cold fronts detected during the period when momentum flux observations are available.

Using **WBF θ** generally increases the flux by 7% (up to 16%) in case of strongly misaligned waves after the cold front.

Taking into account misalignment generally reduces the bias from -4.8% in **WBF** to 1.7% in **WBF θ** .

Conclusions

Investigating the impact of sea state on momentum flux through coupled Ocean-Atmosphere-Wave simulations using the sea surface fluxes parameterization COARE3.5

- COARE3.5 wave-based formulation tends to over-emphasizes the mixed seas and swell impacts on momentum flux.
- Two possible remedies for low stress bias:
 - Wave-wind directional misalignment ($\theta \neq 0$): increases the drag for misaligned waves
 - Mean wave period (T_m): emphasizes the presence of wind waves in the mixed sea state
- Atmospheric cold fronts lead to large areas of mixed sea conditions misaligned with local wind for up to 5 to 10h after the passage of the cold front
- Taking into account misalignment in the flux parameterization generally reduces the bias compared to observations
- Keep working toward a better understanding of the misalignment in different wind waves regimes (i.e., high wind regimes, cross-swell vs opposed swell...)
- Need more long-term co-located observations (wind, waves, momentum flux) like the Pioneer Array.

Ocean surface waves impact on air-sea momentum flux

César Sauvage & Co-Authors

University of Hawai'i at Manoa, Honolulu, HI, USA

Thanks !

- Sauvage, C., Seo, H., Barr, B., Clayson, C-A., Edson, J. (2024). Misaligned Wind-Waves Behind Atmospheric Cold Fronts. In JGR: Oceans. DOI: 10.1029/2024JC021162
- Sauvage, C., Seo, H., Clayson, C-A., Edson, J. (2023). Improving Wave-Based Air-Sea Momentum Flux Parameterization in Mixed Seas. In JGR: Oceans. DOI: 10.1029/2022JC019277
- COARE3.5 modified: https://github.com/cesarsauvage/COARE3.5_modified_Sauvage-et-al._2023



UNIVERSITY
of HAWAII®
MĀNOA



Contact: csauvage@hawaii.edu

Supplementary figures

The peak wave period does not always represents accurately the sea state and tend to overestimate the impact of mixed sea under moderate wind conditions

The mean period is more appropriate and shift the wave age distribution to younger waves.

$$Z_{rough} = H_s \cdot 0.39 \cdot \left(\frac{u_*}{C_m} \right)^{2.6}$$

WBF_tm
(———, Jan 8)

Ron Brown
(- - - -)

